MEDICAL IMAGING INFORMATICS: LECTURE # 6

SEGMENTATION

Norbert Schuff
Professor of Radiology
VA Medical Center and UCSF
Norbert.schuff@ucsf.edu

Overview

- Definitions
- Role of Segmentation
- Segmentation methods
  - Intensity based
  - Shape based
  - Texture based
- Summary & Conclusion
- Literature

The Concept Of Segmentation

Identify classes (features) that characterize this image!

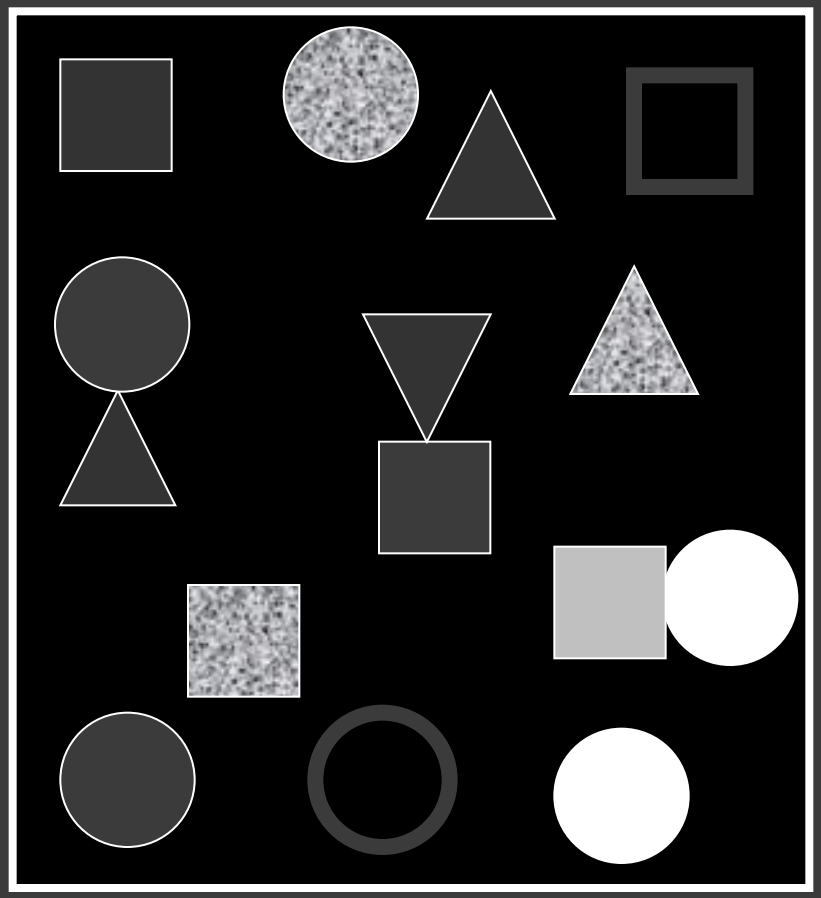

Intensity: Bright - dark

Shape: Squares , spheres, triangles

Texture: homogeneous – speckled

Connectivity: Isolated - connected

Topology: Closed - open

More On The Concept Of Segmentation

Can you still identify multiple classes in each image?

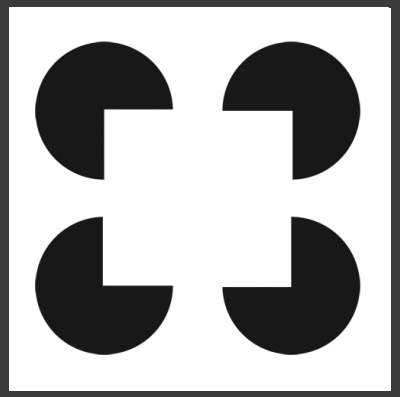

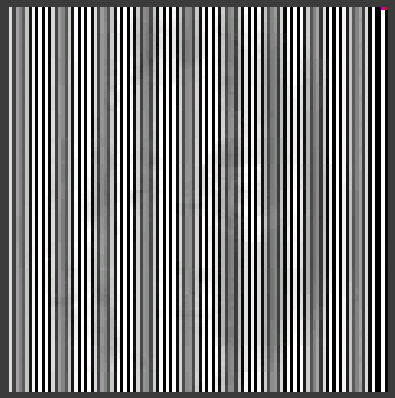

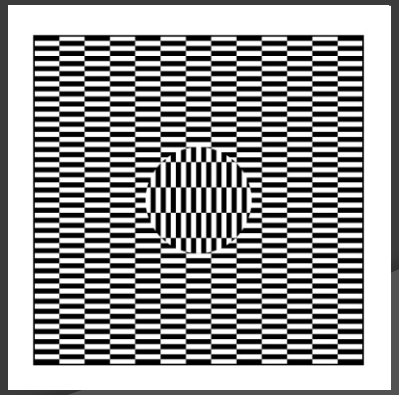

Segmentation Of Scenes

Segment this scene!
Hint: Use color composition and spatial features

By J. Chen and T. Pappas; 2006, SPIE; DOI: 10.1117/2.1200602.0016

Examples: Intensity and Texture

By intensity

Gray matter segmentation

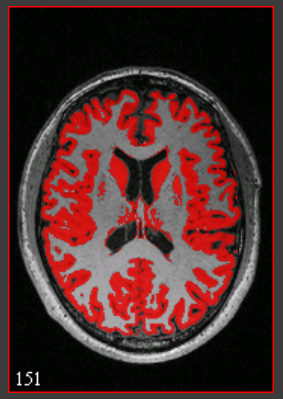

By texture

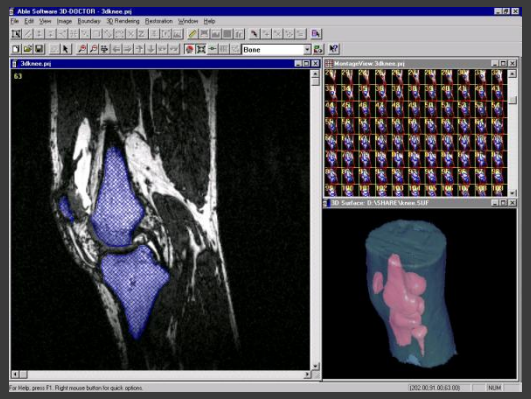

image at: www.ablesw.com/3d-doctor/3dseg.htm

Segmentation of abdominal CT scan

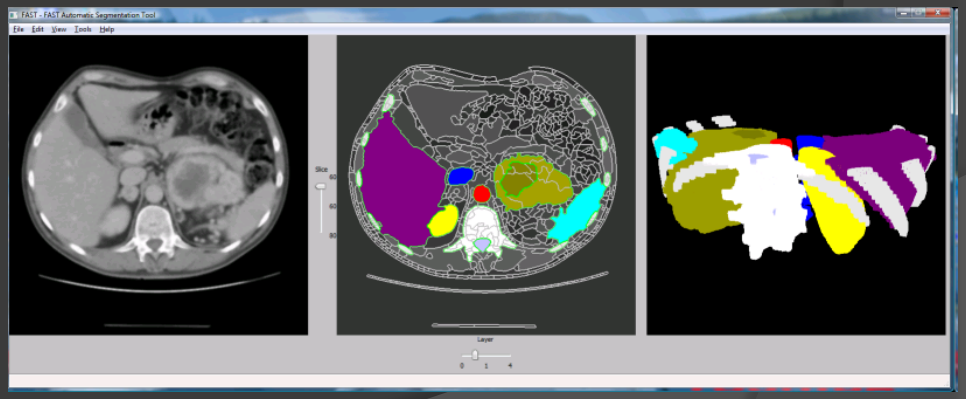

Stephen Cameron. Oxford U, Computing Laboratory

Definitions

- Segmentation is the partitioning of an image into regions that are homogeneous with respect to some characteristics.

<u>In medical context:</u>

- Segmentation is the delineation of anatomical structures and other regions of interest, i.e. lesions, tumors.

Formal Definition

If the domain of an image is Ω, then the segmentation problem is to determine sets (classes) Z_k, whose union represent the entire domain

$$\Omega = \bigcup_{k=1}^{N} Z_k$$

Sets are connected:

$$Z_k \bigcap Z_j = \alpha; k \neq j$$

UCSF VA
Department of
Radiology & Biomedical Imaging

More Definitions

- When the constraint of connected regions is removed, then determining the sets Z_k is termed pixel classification.
- Determining the total number of sets K can be a challenging problem.
- In medical imaging, the number of sets is often based on a-priori knowledge of anatomy, e.g. K=3 (gray, white, CSF) for brain imaging.

Labeling

- Labeling is the process of assigning a meaningful designation to each region or pixel.
- This process is often performed separately from segmentation.
- Generally, computer-automated labeling is desirable
- Labeling and sets Z_k may not necessarily share a one-to-one correspondence

Dimensionality

- Dimensionality refers to whether the segmentation operates in a 2D or 3D domain.
- Generally, 2D methods are applied to 2D images and 3D methods to 3D images.
- In some instances, 2D methods can be applied sequentially to 3D images.

Characteristic and Membership Functions

- A characteristic function is an indicator whether a pixel at location j belongs to a particular class Z_k.

$$\chi_k \quad j \quad = \begin{cases} 1\, if\, .element.of\, .class \\ 0 \qquad otherwise \end{cases}$$

- This can be generalized to a membership function, which does not have to be binary valued.

$$0 \le \chi_k \quad j \quad \ge 1,\ for.all.pixels.\&.classes$$

$$\sum_{k=1}^{N} \chi_k \quad j \quad = 1, for.all.pixels$$

- The characteristic function describes a "deterministic" segmentation process whereas the membership function describes a "probabilistic" one.

Segmentation Has An Important Role

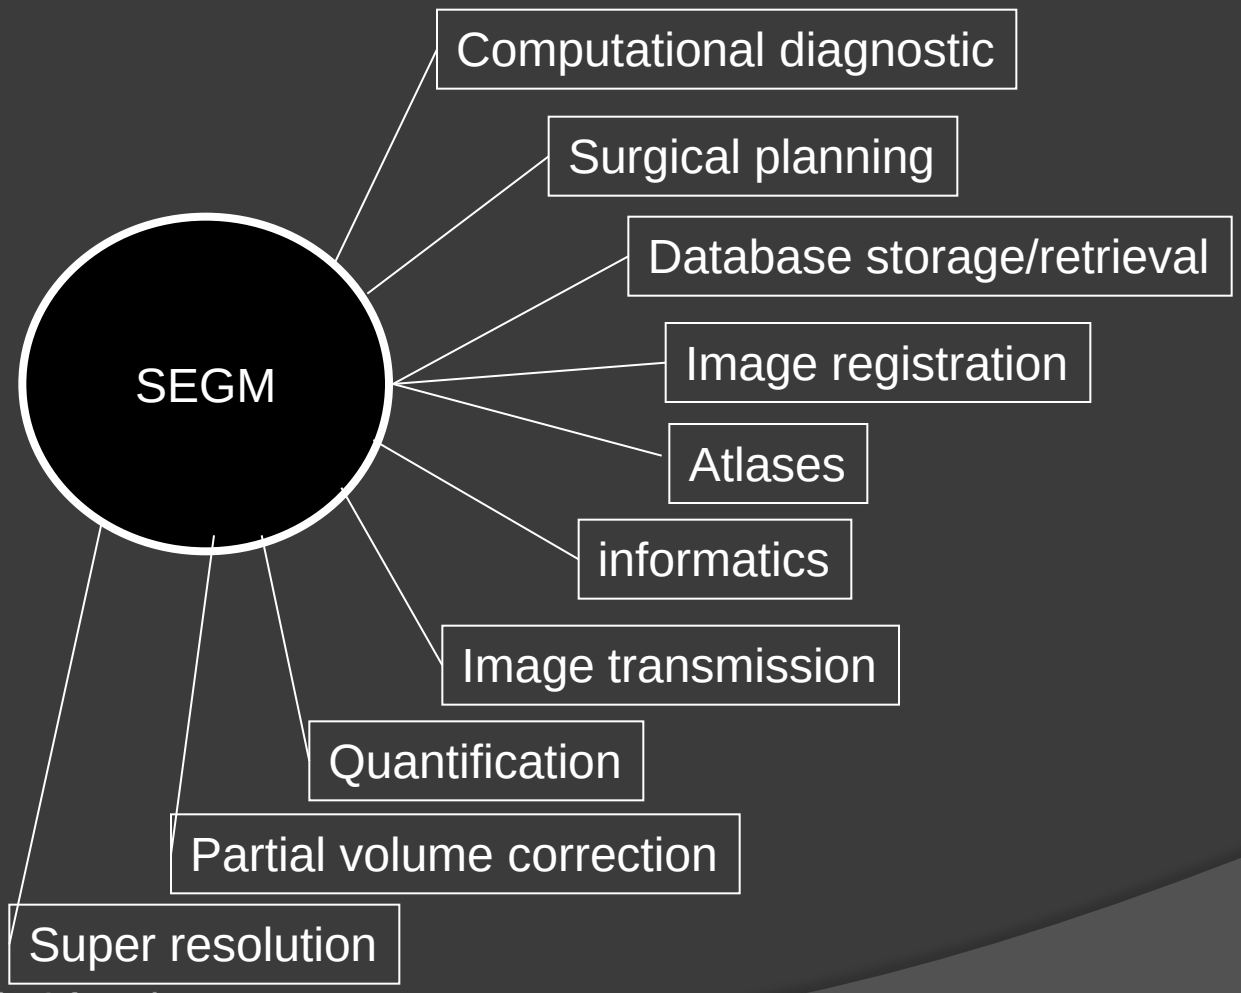

Segmentation Methods

Threshold Method

Angiogram showing a right MCA aneurysm

Dr. Chris Ekong;
www.medi-fax.com/atlas/brainaneurysms/case15.htm

Histogram (fictitious)

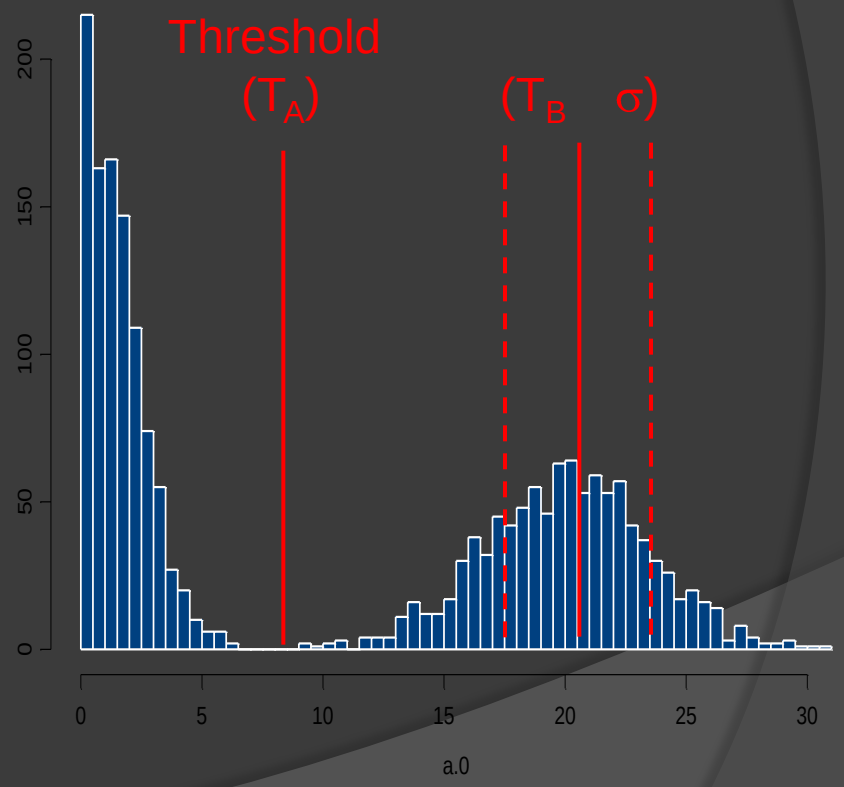

Threshold Method

Original

Threshold min/max

Threshold standard deviation

Threshold Method Applied To Brain MRI

White matter segmentation

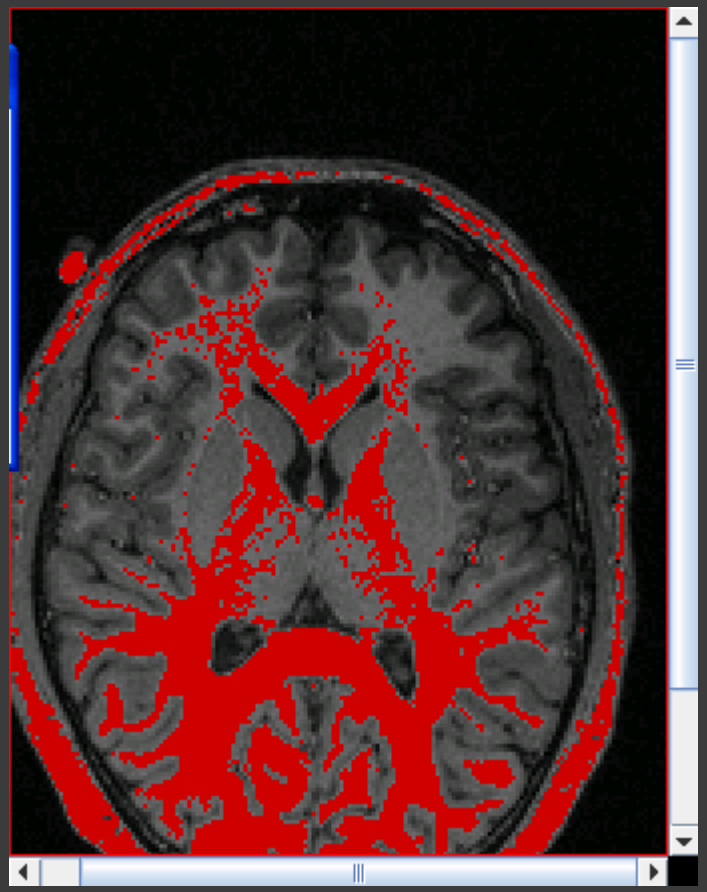

- Major failures:
  - Anatomically non-specific
  - Insensitive to global signal inhomogeneity

Threshold: Principle Limitations

- Works only for segmentation based on intensities
- Robust only for images with global uniformity and high contrast to noise
- Local variability causes distortions
- Intrinsic assumption is made that the probability of features is uniformly distributed

Region Growing - Edge Detection

Seed point

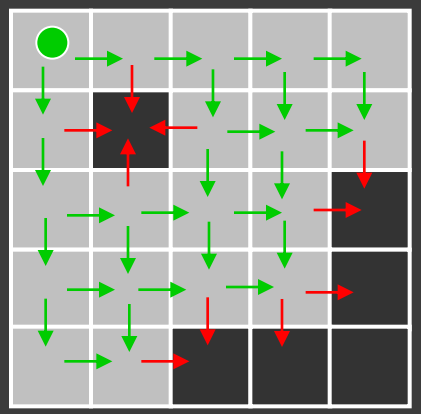

- Region growing groups pixels or subregions into larger regions.
- A simple procedure is pixel aggregation,
- It starts with a “seed” point and progresses to neighboring pixels that have similar properties.
- Region growing is better than edge detection in noisy

Guided e.g. by energy potentials:

Similarity: $V\ i,j\ = \frac{I_i - I_j}{\sigma_{i,j}}, equivalent.to.a.z$

Edges: $V\ l,r\ = I_l - I_r\ \cdot erf(x) + I_r$

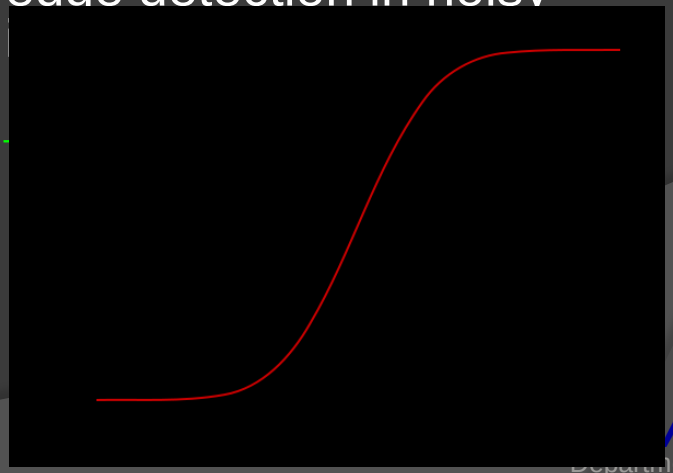

Region Growing – Watershed Technique

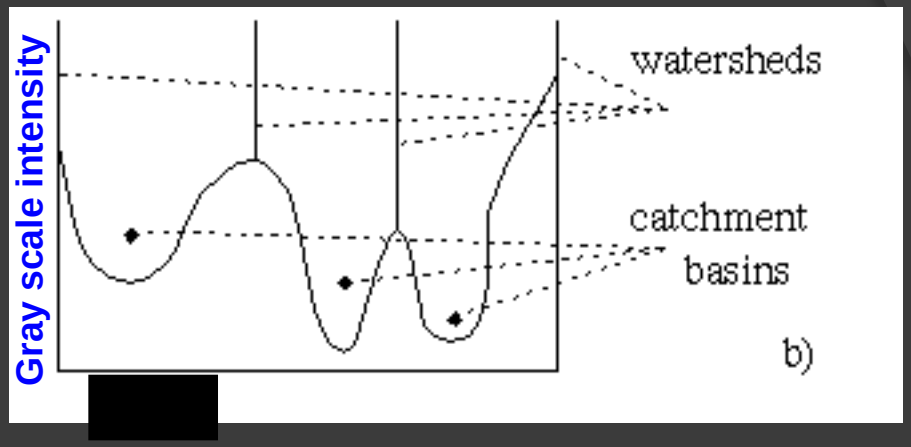

CT of different types of bone tissue (femur area)

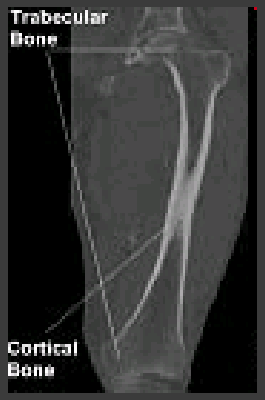

M. Straka, et al. Proceedings of MIT 2003

(a) WS over-segmentation
(b) WS conditioned by regional density mean values
(c) WS conditioned by hierarchical ordering of regional density mean values

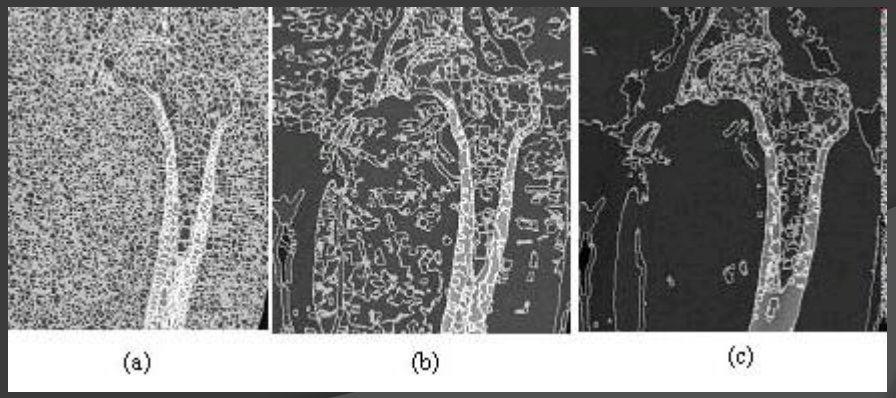

Region Growing: Principle Limitations

- Segmentation results dependent on seed selection
- Local variability dominates the growth process
- Global features are ignored

- Generalization needed:
  - Unsupervised segmentation (i.e.insensitive to selection of seeds)
  - Exploitation of both local and global variability

Clustering

- Generalization using clustering
- Two commonly used clustering algorithms
  - K-mean
  - Fuzzy C-mean

Definitions: Clustering

- Clustering is a process for classifying patterns in such a way that the samples within a class Z_k are more similar to one another than samples belonging to the other classes Z_m, m ≠k; m = 1…K.

- The ***k*-means algorithm** attempts to cluster *n* patterns based on attributes (e.g. intensity) into *k* classes *k* < *n*.
- The objective is to minimize total intra-cluster variance in the least-square sense:

$$\sigma = \sum_{k=1}^{K} \sum_{\chi_j \in S_k} \chi_j - \mu_k \quad {}^2$$

- *for k* clusters Z_k, *k*= 1, 2, ..., *K*. μ_i is the mean point (centroid) of all pattern values $\chi_j \in Z_k$.

Fuzzy Clustering

- The ***fuzzy C*-means algorithm** is a generalization of K-means.
- Rather than assigning a pattern to only one class, the ***fuzzy C*-means** assigns the pattern a number m, *0* <= *m* <= *1,* described as membership function.

K- means

Three classes

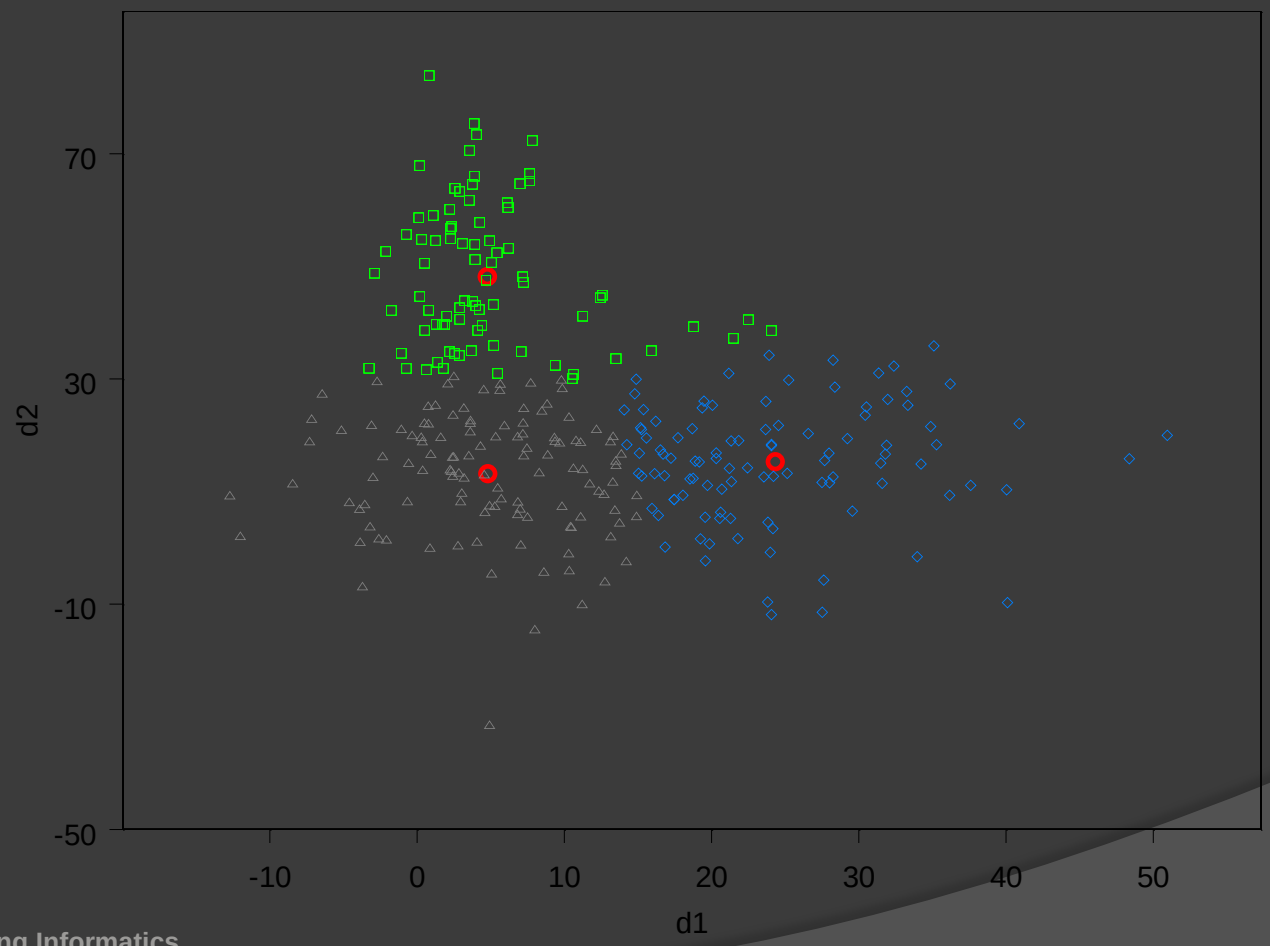

K - means

Four classes

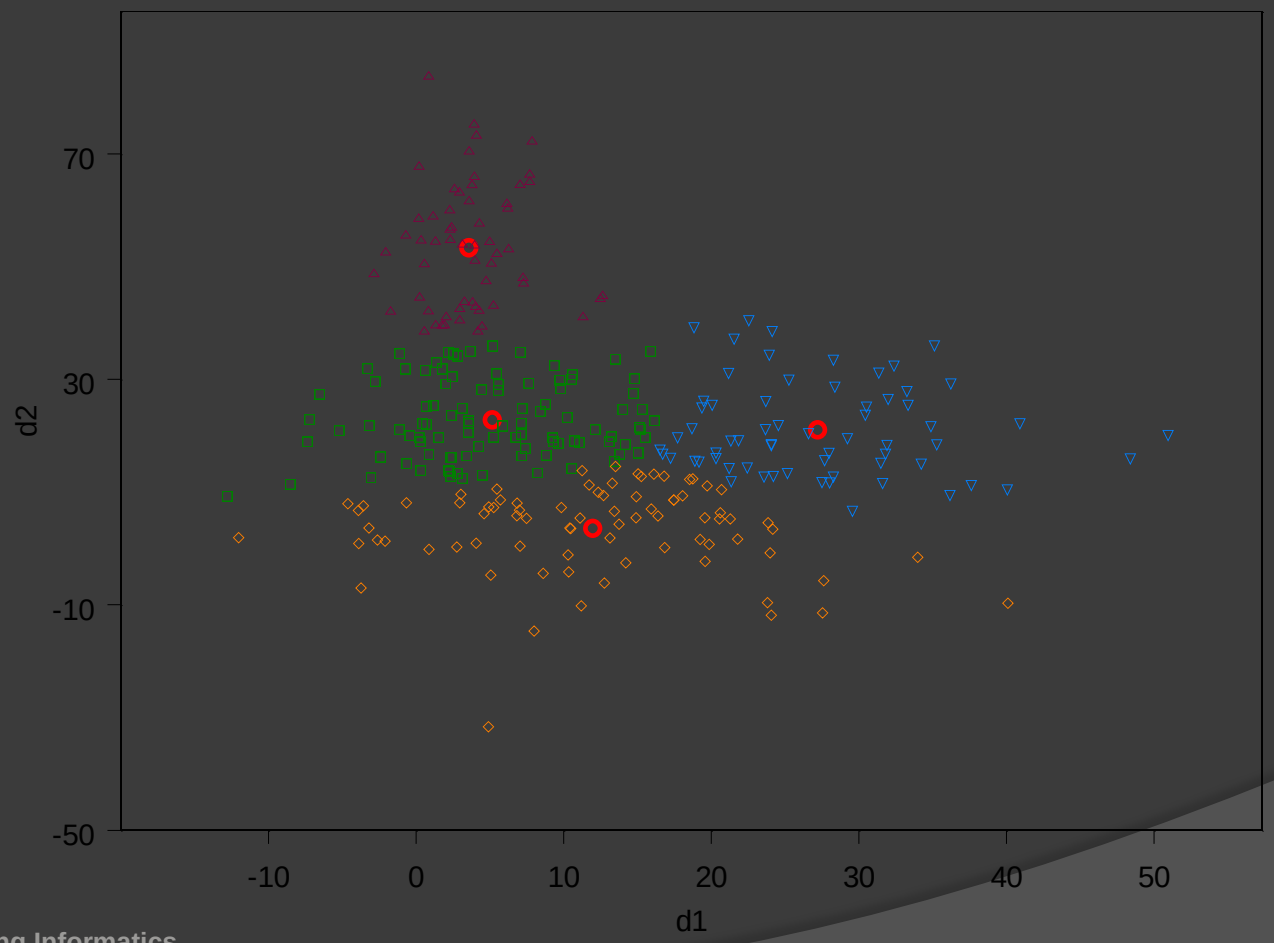

K - means

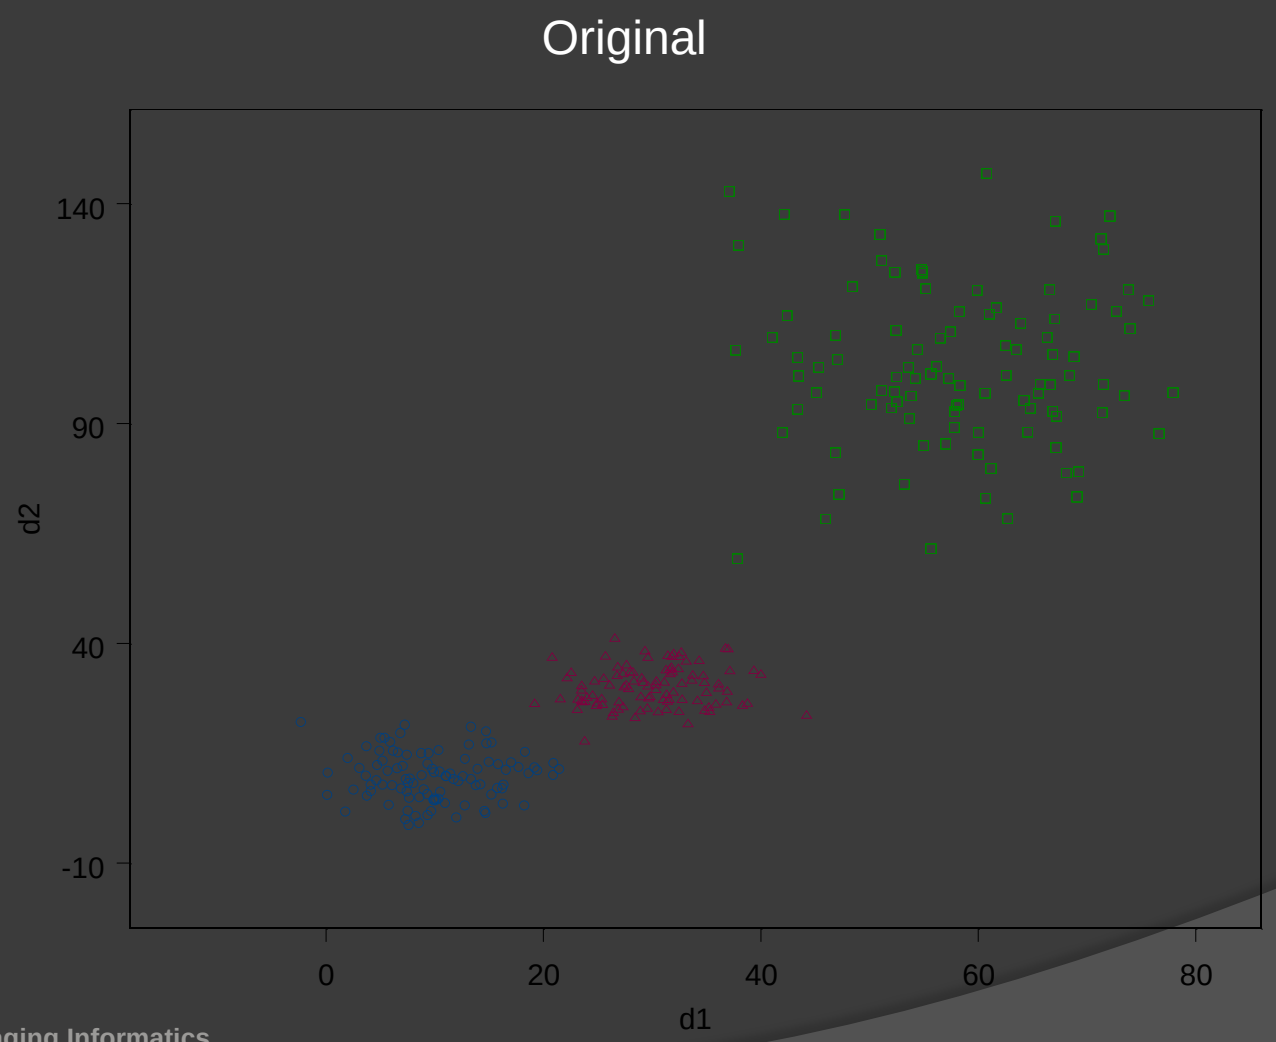

K - means

2 clusters

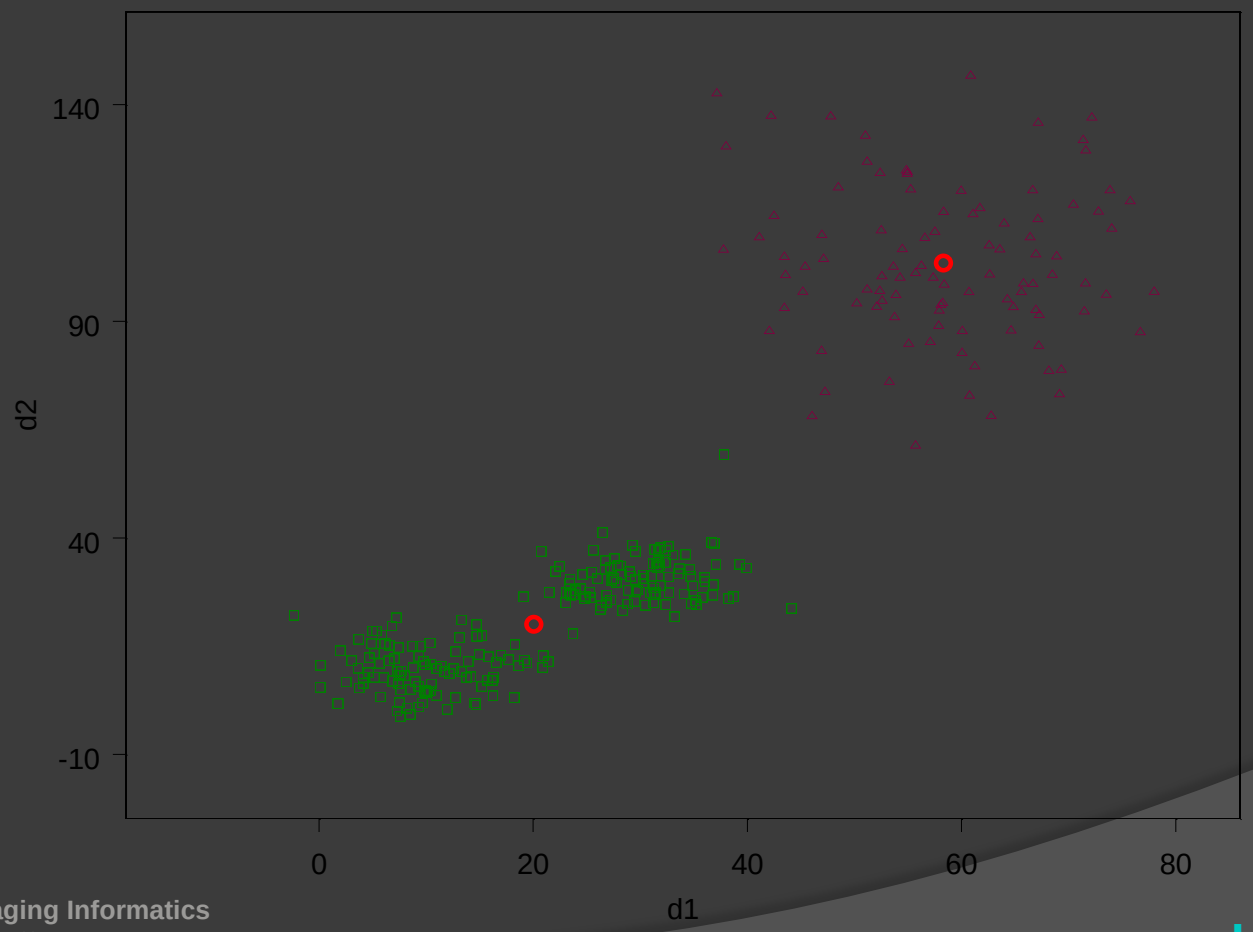

K - means

Three classes

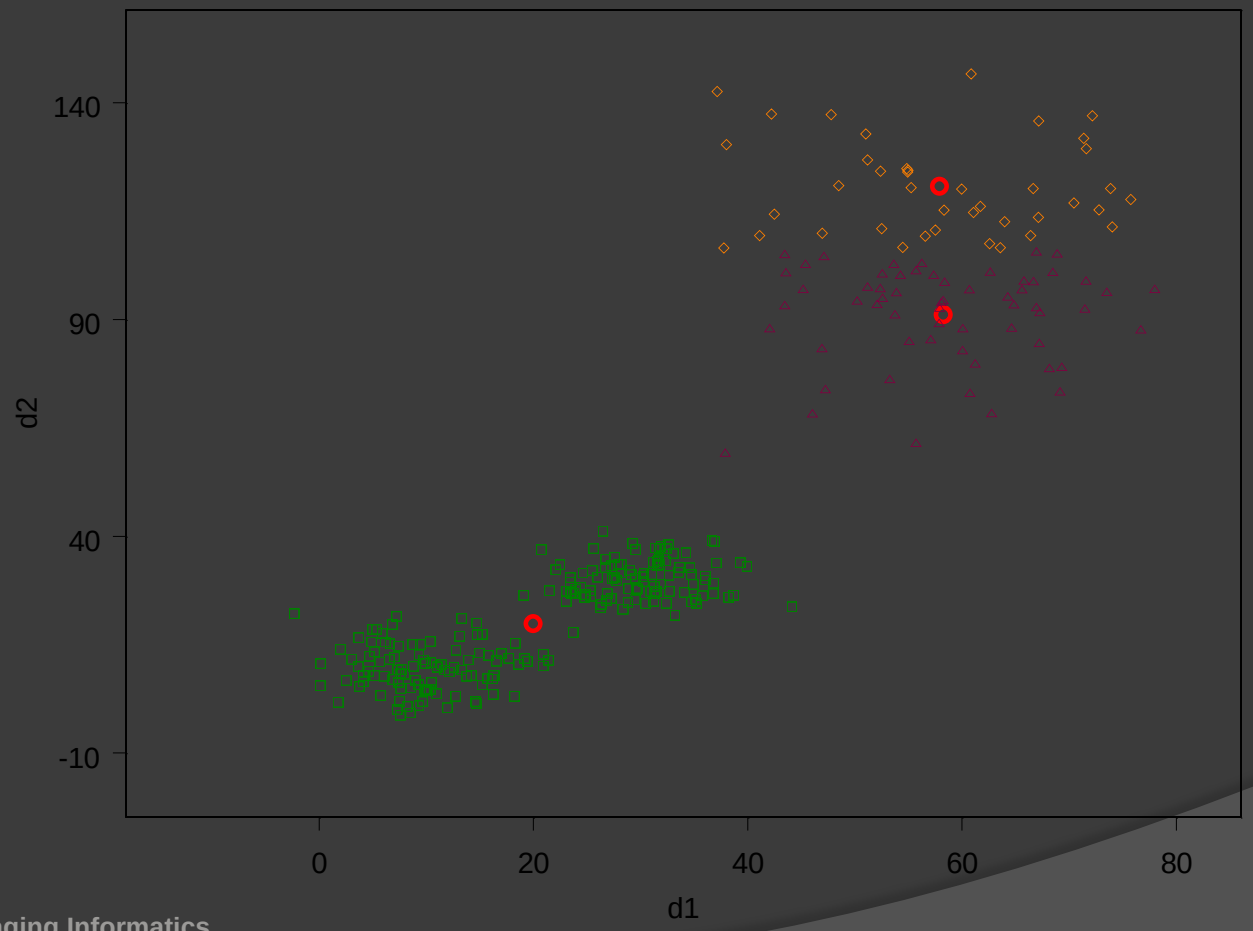

K – means: TRAPPED!

Five classes

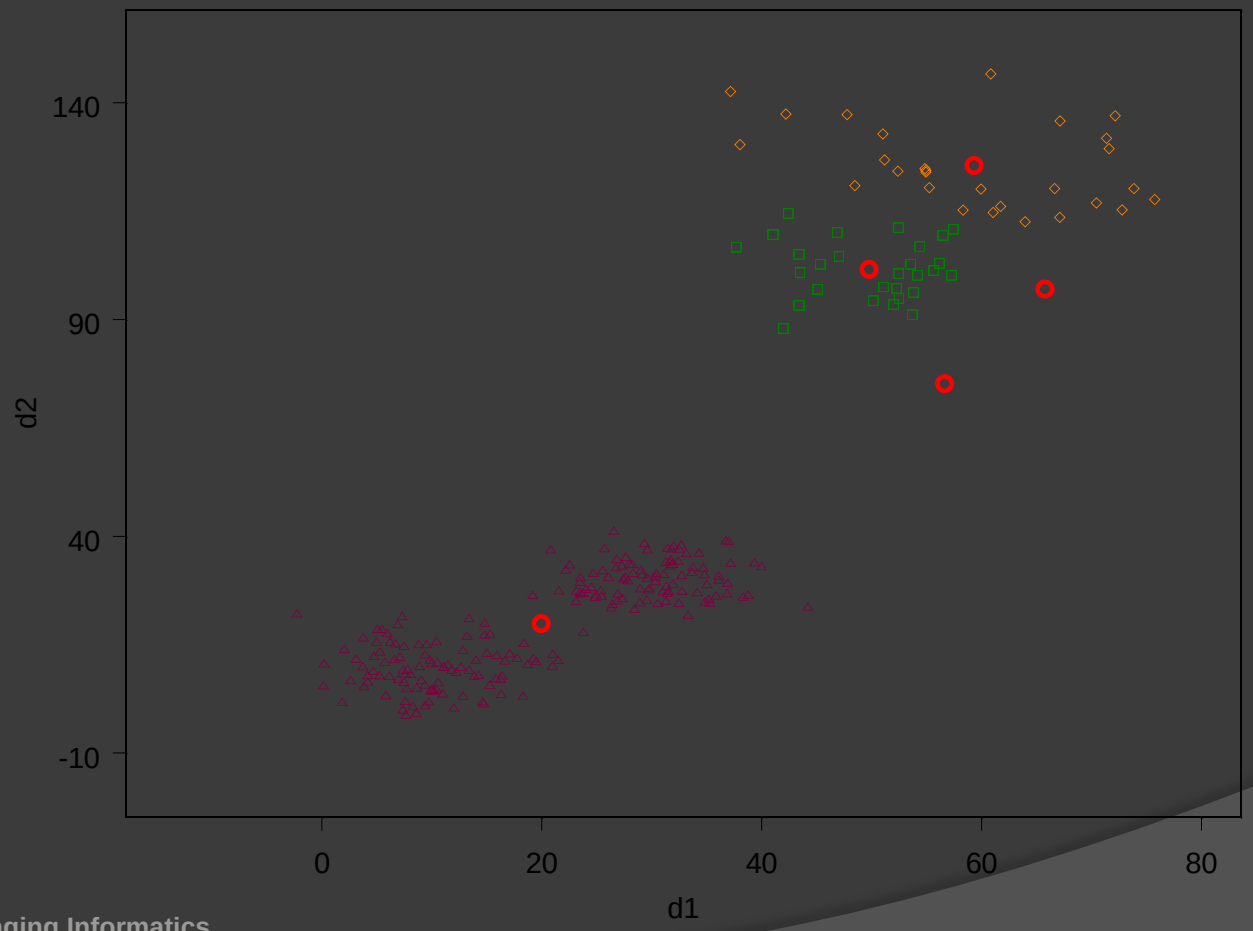

Fuzzy C - means

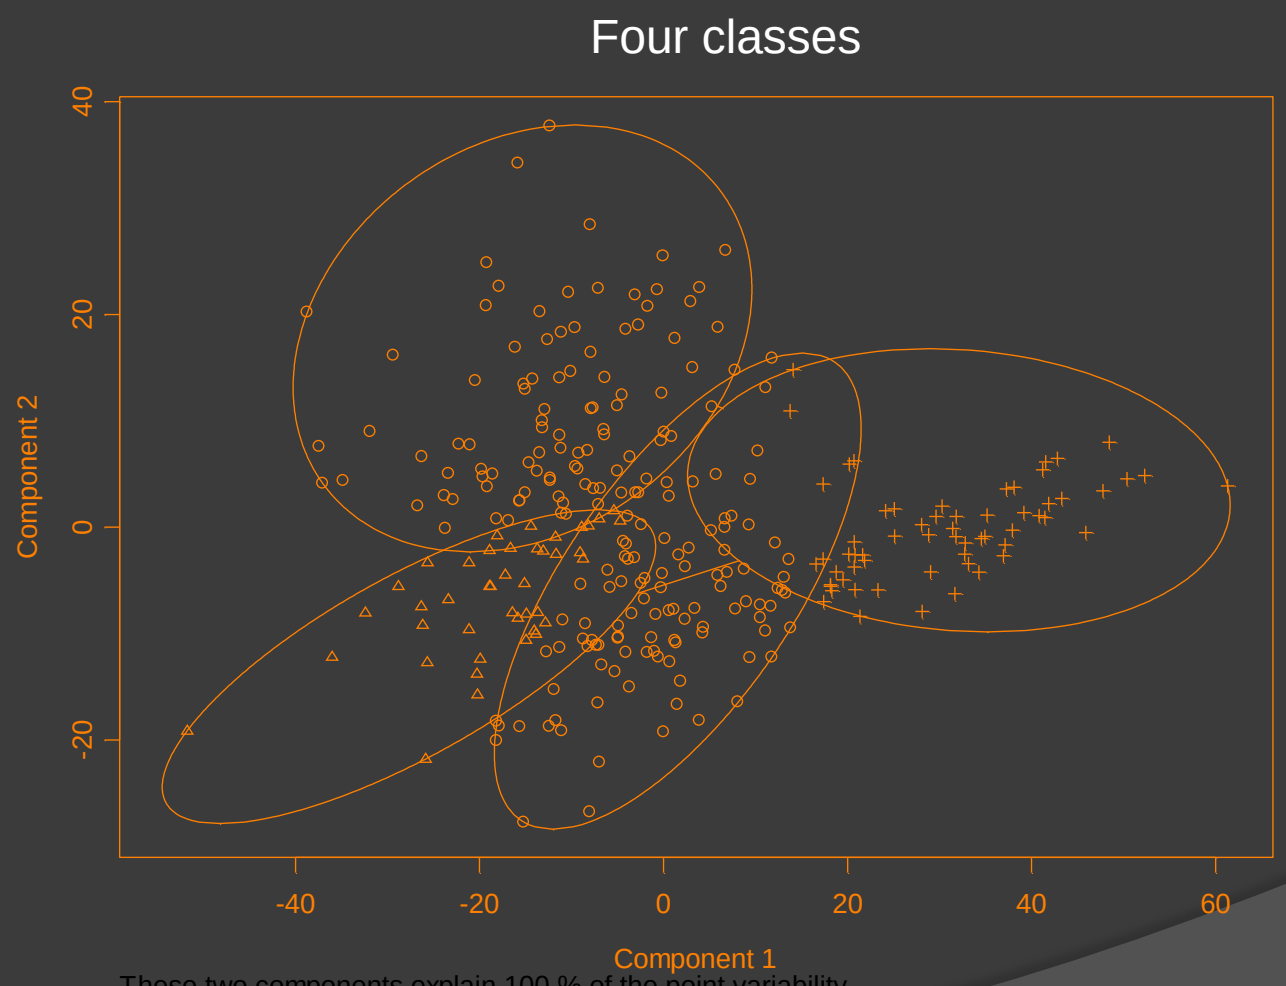

These two components explain 100 % of the point variability.

Fuzzy C- Means Segmentation I

Two classes

Original

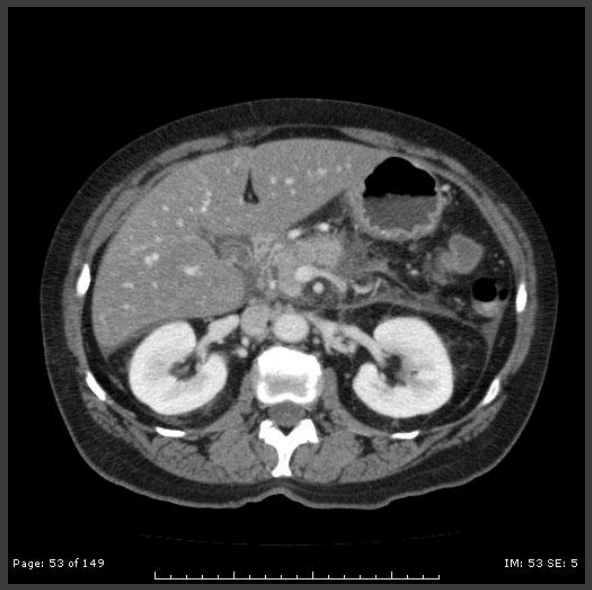

Class I

Class 2

Fuzzy Segmentation II

Four classes

Original

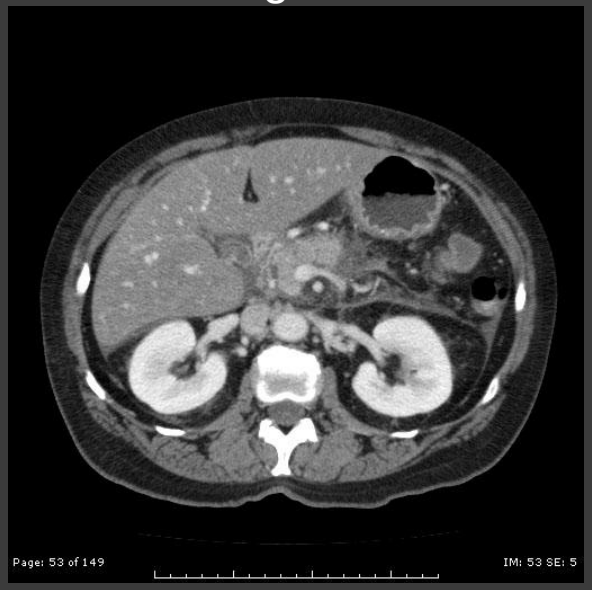

Class 1

Class 2

Class 3

Class 4

Brain Segmentation With Fuzzy C-Means

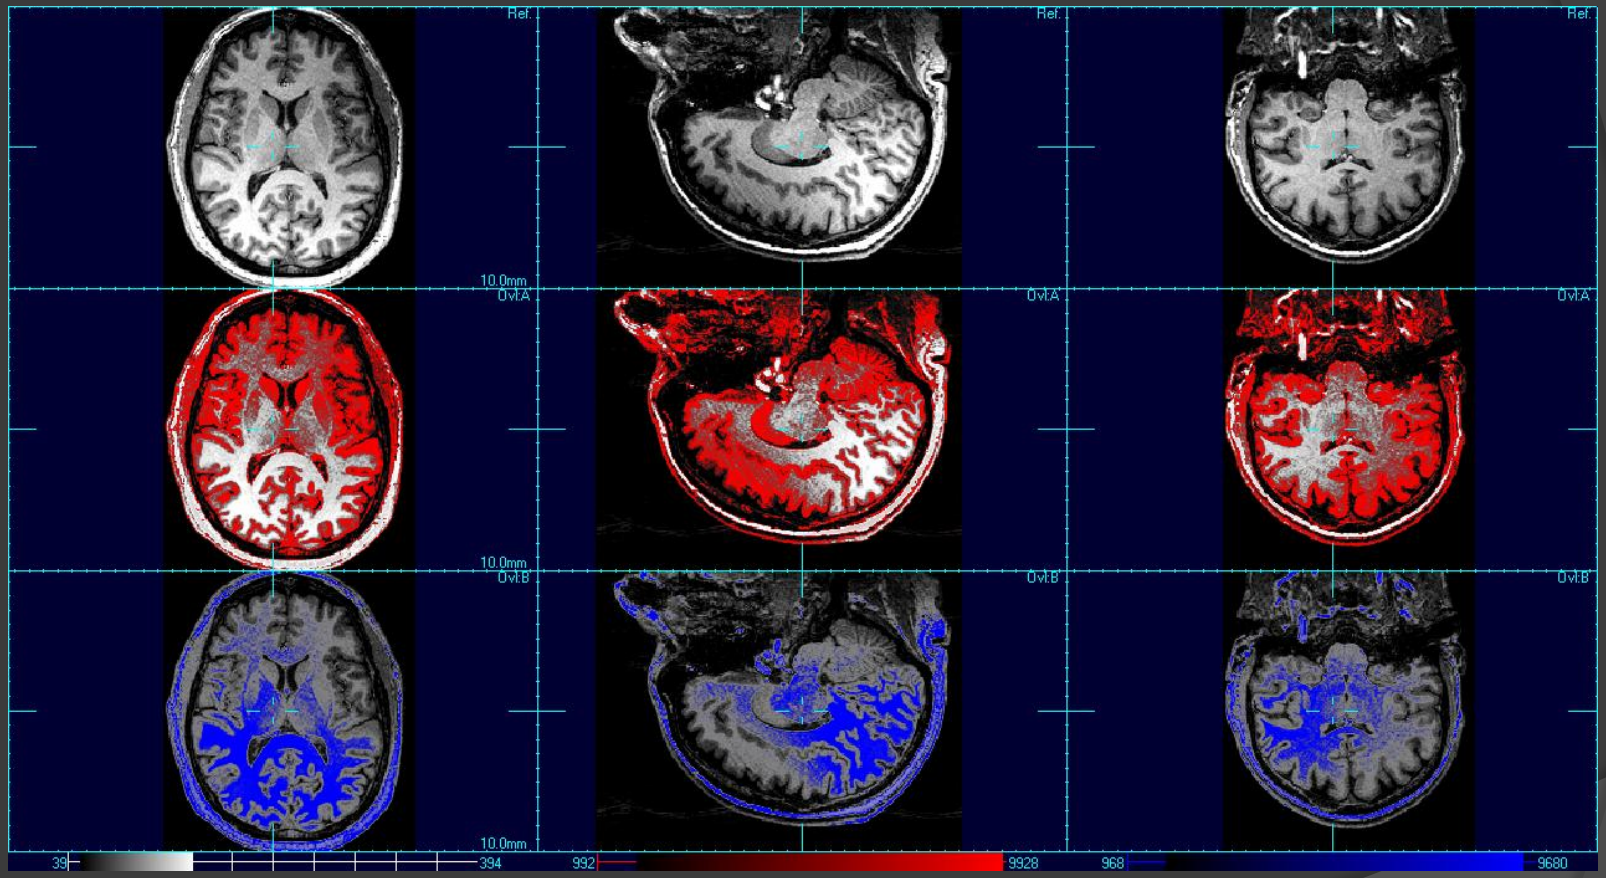

4T MRI, bias field inhomogeneity contributes to the problem of poor segmentation

Clustering: Principle Limitations

- Convergence to the optimal configuration is not guaranteed.
- Outcome depends on the number of clusters chosen.
- No easy control over balancing global and local variability
- Intrinsic assumption of a uniform feature probability is still being made

- Generalization needed:
  - Relax requirement to predetermine number of classes
  - Balance influence of global and local variability
  - Possibility to including a-priori information, such as non-uniform distribution of features.

Segmentation As Probabilistic Problem

- Treat both intensities **Y** and classes **Z** as random distributions
- The segmentation problems is to find the classes that maximize the likelihood to represent the image

- Segmentation in Bayesian formulation becomes :

$$P(A|B) = \frac{P(B|A) * P(A)}{P(B)}$$

- where
  - A is the segmented image (classes $a_1 \ldots a_K$)
  - B is the observed image (values $b_1 \ldots b_n$)
  - p(A) is the prior probability
  - p(B|A) is the likelihood
  - P(A|B) is the segmentation that best represents the observation

Bayesian Concept

$$p(A|B) \propto p(B|A) * p(A)$$

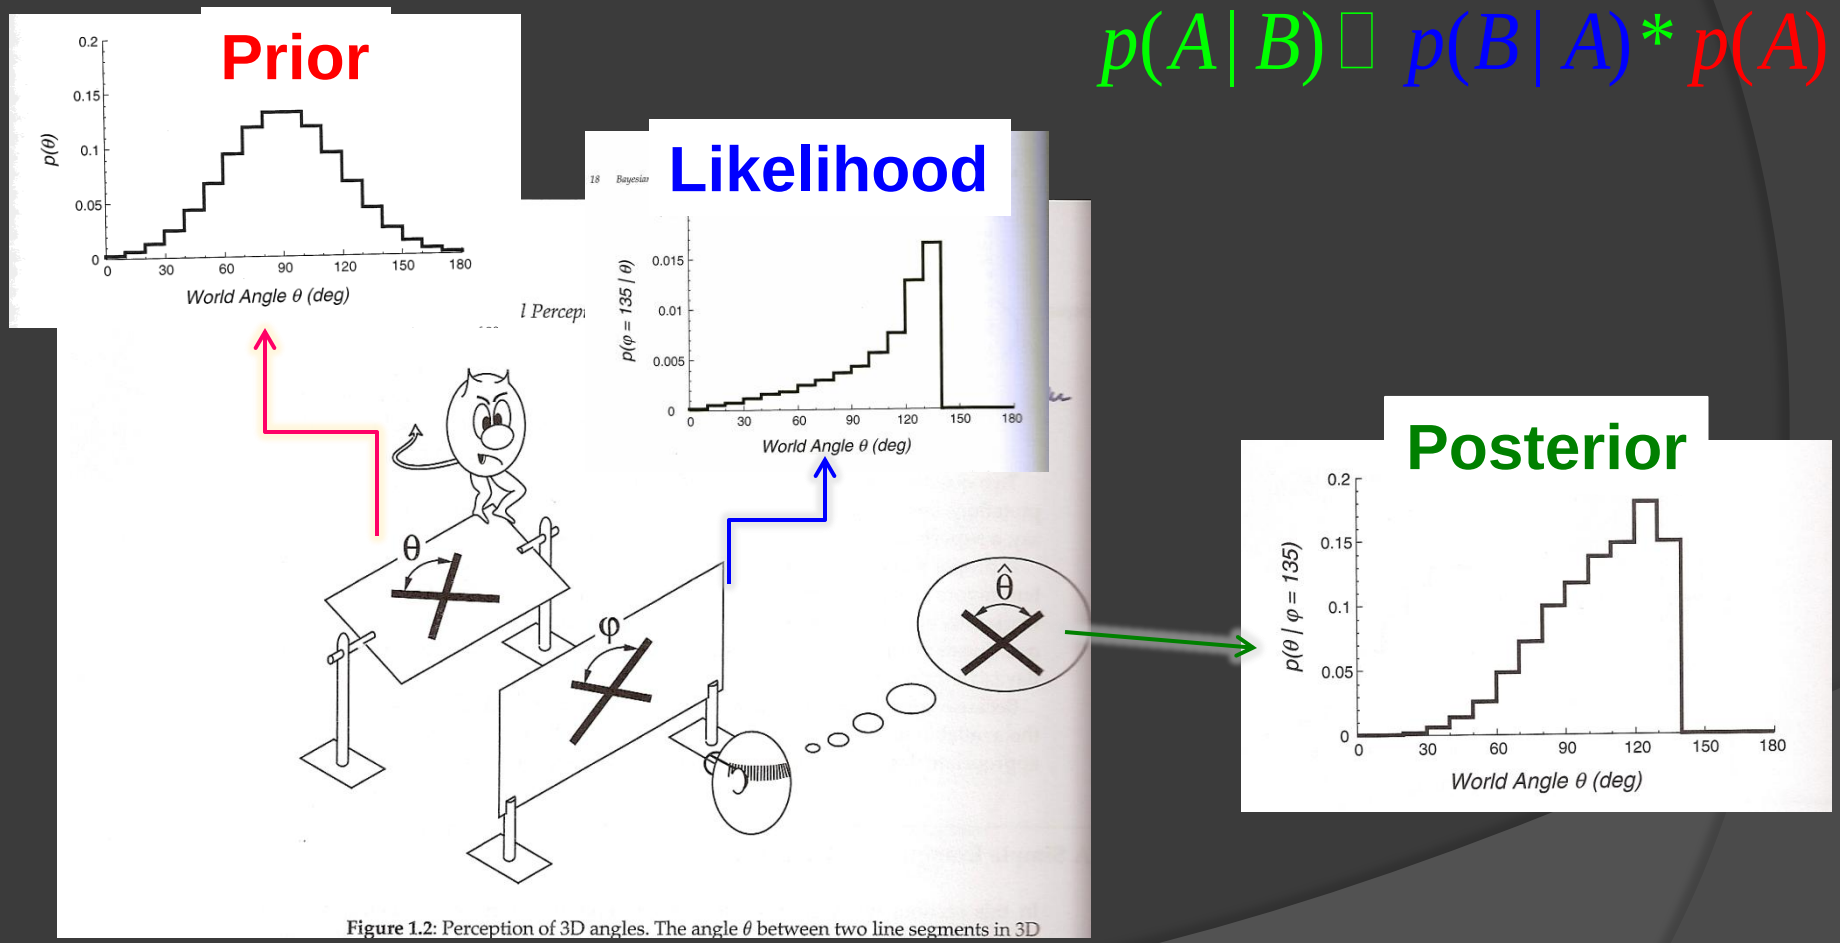

Treat Segmentation As Energy Minimization Problem

- Since p(B) = observation is stable, it follows:

$$\ln\ p(A|B) = \ln\ p(B|A) + \ln\ p(A)$$

- The goal is to find the most probably distribution of p(A|B) given the observation p(B)
- Since the log probabilities are all additive, they are equivalent to distribution of energy
- segmentation becomes an ***energy minimization problem***.
- This means in particular that no probabilistic point of view is finally required.

UCSF VA
Department of Radiology & Biomedical Imaging

Probability In Spatial Context

- Use the concept of Markov Random Fields (MRF) for segmentation

- Definition:
  - Classes Z are a MRF
    - Classes exist: $p(z) > 0$ for all $z \in Z$
    - Probability of z at a location depends only on neighbors
    - Observed intensities are a random process following a distribution of many degrees of freedom (Gibbs distribution).

MRF Based Segmentation

1st and 2nd order MRFs

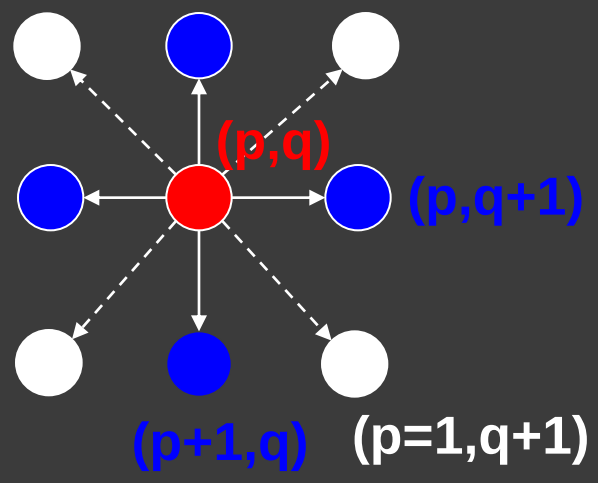

MRF Based Segmentation

1st and 2nd order MRFs

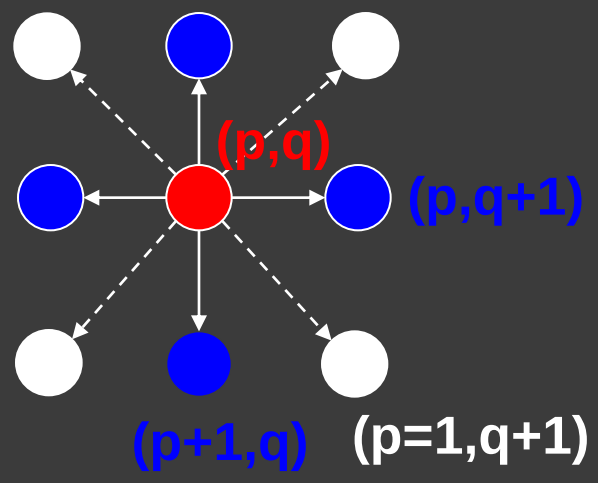

- Step I: Define prior class distribution energy:

$$\delta\ z_s, z_t = \begin{cases} -1, & z_s = z_t \\ +1 & z_s \neq z_t \end{cases}$$

MRF Based Segmentation

1st and 2nd order MRFs

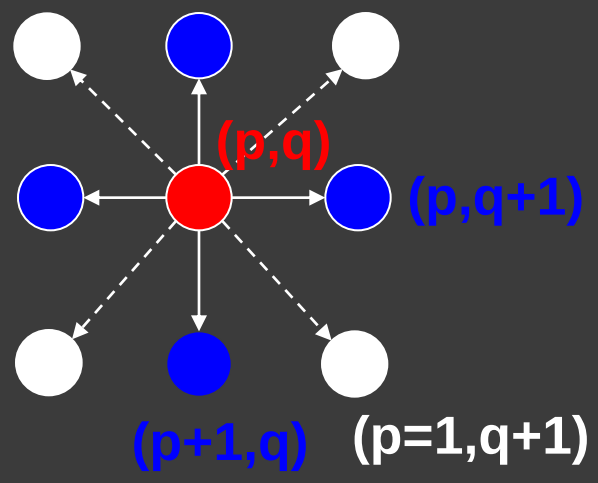

- Step I: Define prior class distribution energy:

$$\delta\ z_s, z_t = \begin{cases} -1, & z_s = z_t \\ +1 & z_s \neq z_t \end{cases}$$

- Step II: Select distribution of conditional observation probability, e.g gaussian:

$$E_{y|z}\ p,q \propto \frac{y_{p,q} - \mu_z^{\ 2}}{2\sigma_z^2}.$$

  - $Y_{p,q}$ is the pixel value at location (p,q)
  - μ_z and σ_z are the mean value and variance of the class z

MRF Based Segmentation

1st and 2nd order MRFs

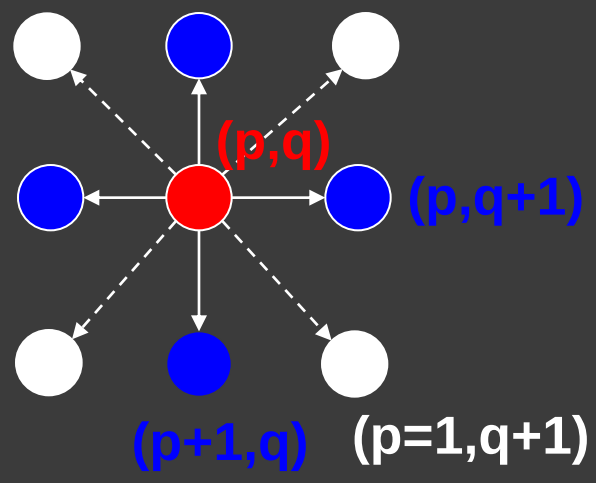

Step III: Solve (iteratively) for the minimal distribution energy

$$\arg\min E_{z|y}\ p,q \propto \underbrace{\sum_{t\in N_s} \delta\ z_s, z_t}_{\text{assignment energy}} + \underbrace{\frac{y_{p.q} - \mu_z}{2\sigma_z^2}^{2}}_{\text{similarity}}$$

How To Obtain A Prior Of Class Distributions?

Average Gray Matter Map
Of 40 Subjects

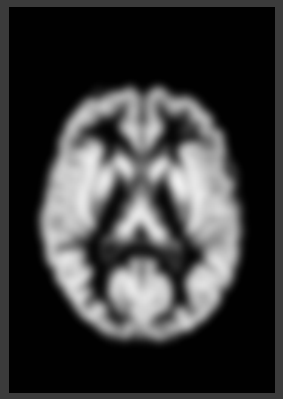

Register to

Segment

Individual MRI

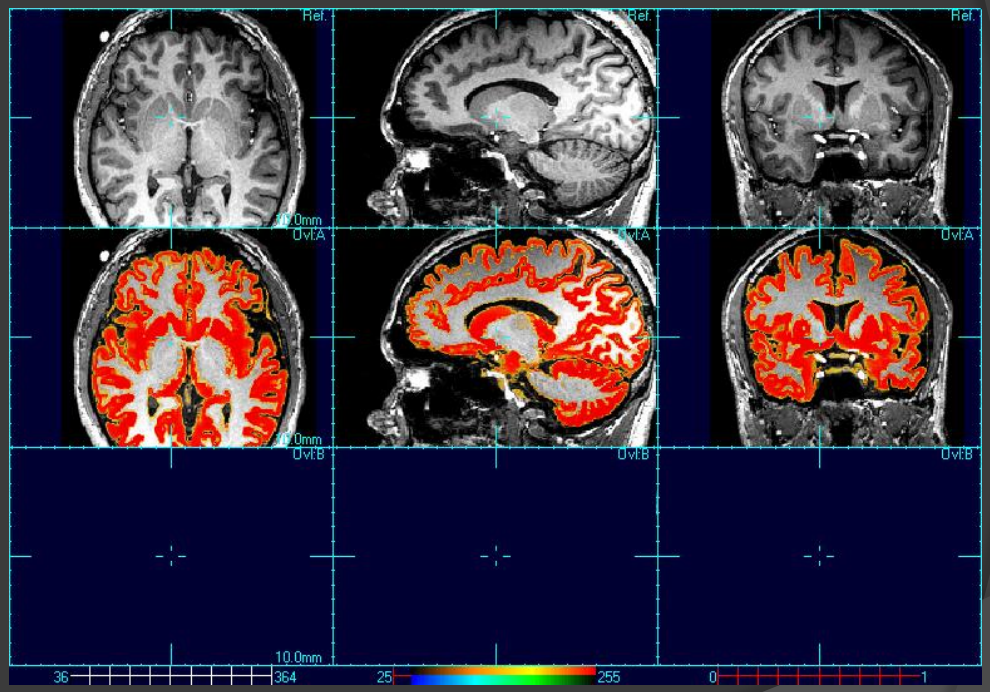

The Process of MRF Based Segmentation



Update MRF



classify

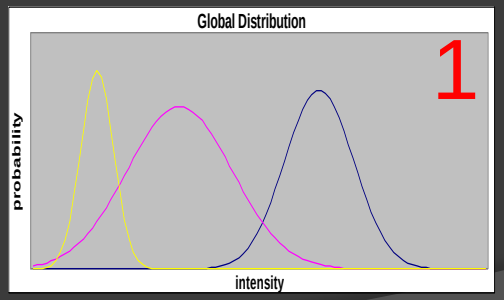

Distribution model

Department of
Radiology & Biomedical Imaging

UCSF VA

MRF Based Segmentations

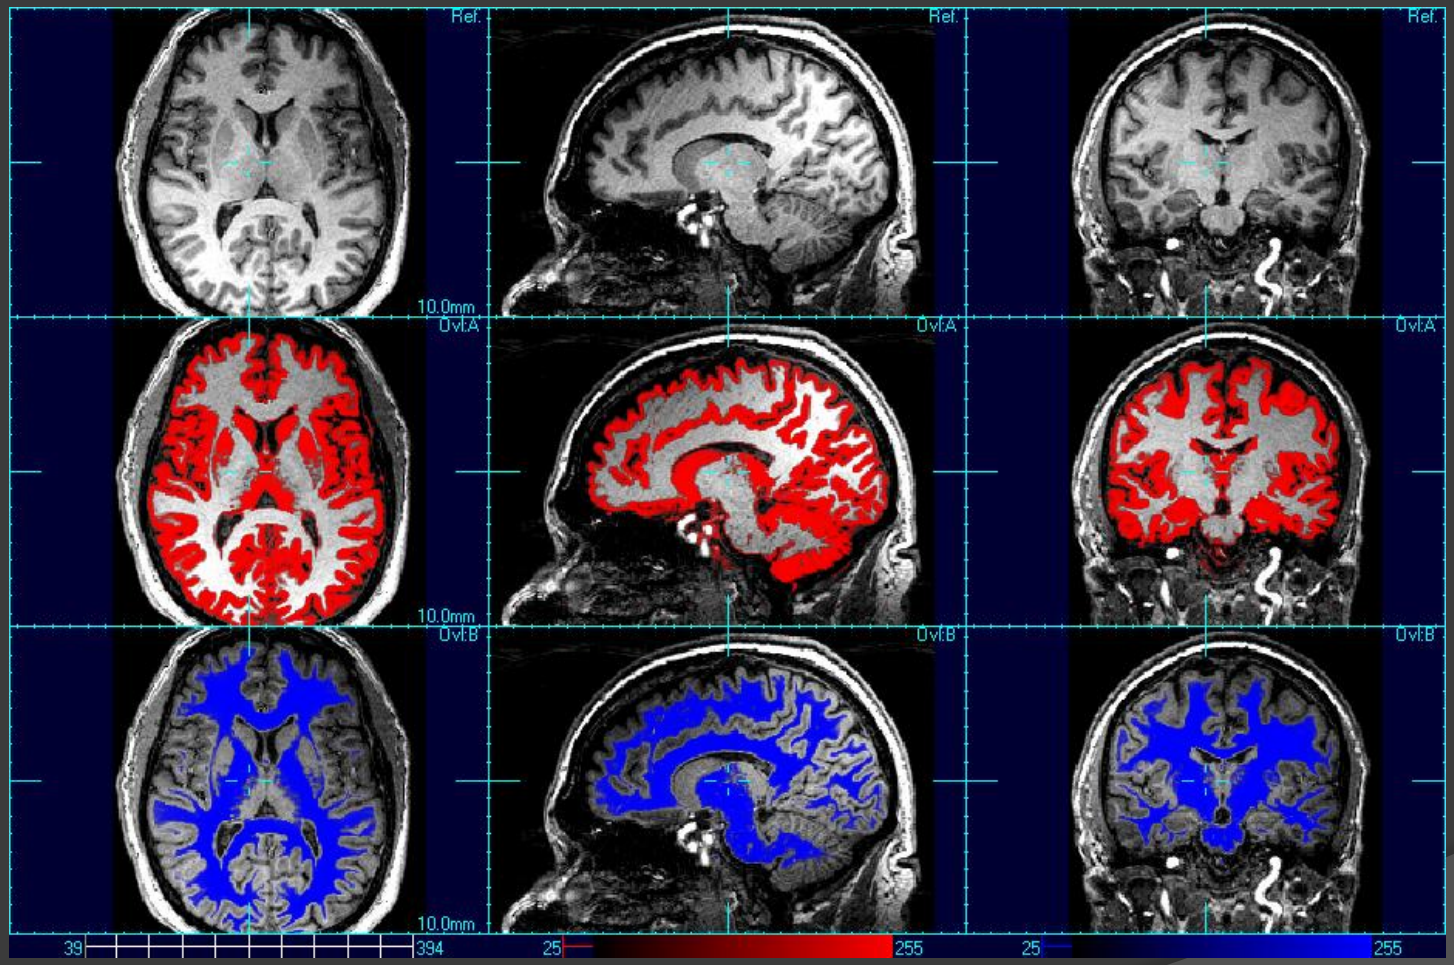

4T MRI, SPM2, priors for GM, WM based on 60 subjects

Generalization: Mixed Gaussian Distributions

White matter

$$\arg\min E_{z|y} \quad p,q \quad \propto \sum_{t \in N_s} \delta \quad z_s, z_t \quad + \frac{y_{p.q} - \mu_z \quad {}^2}{2\sigma_z^2}.$$

White matter White matter lesion

$$\arg\min E_{z|y} \quad p,q \quad \propto \sum_{t \in N_s} \delta \quad z_s, z_t \quad + \frac{y_{p.q} - \mu_z \quad {}^2}{2\sigma_z^2} + \frac{y_{p.q} - \mu_w \quad {}^2}{2\sigma_w^2} + .$$

Find solution iteratively using Expectation Maximization (EM)

Expectation Maximization Of MRF Based Segmentation



UpdateMRF



classify

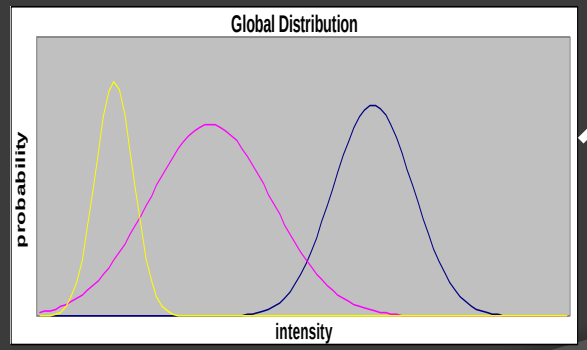

Update distribution model

EMS

Standard

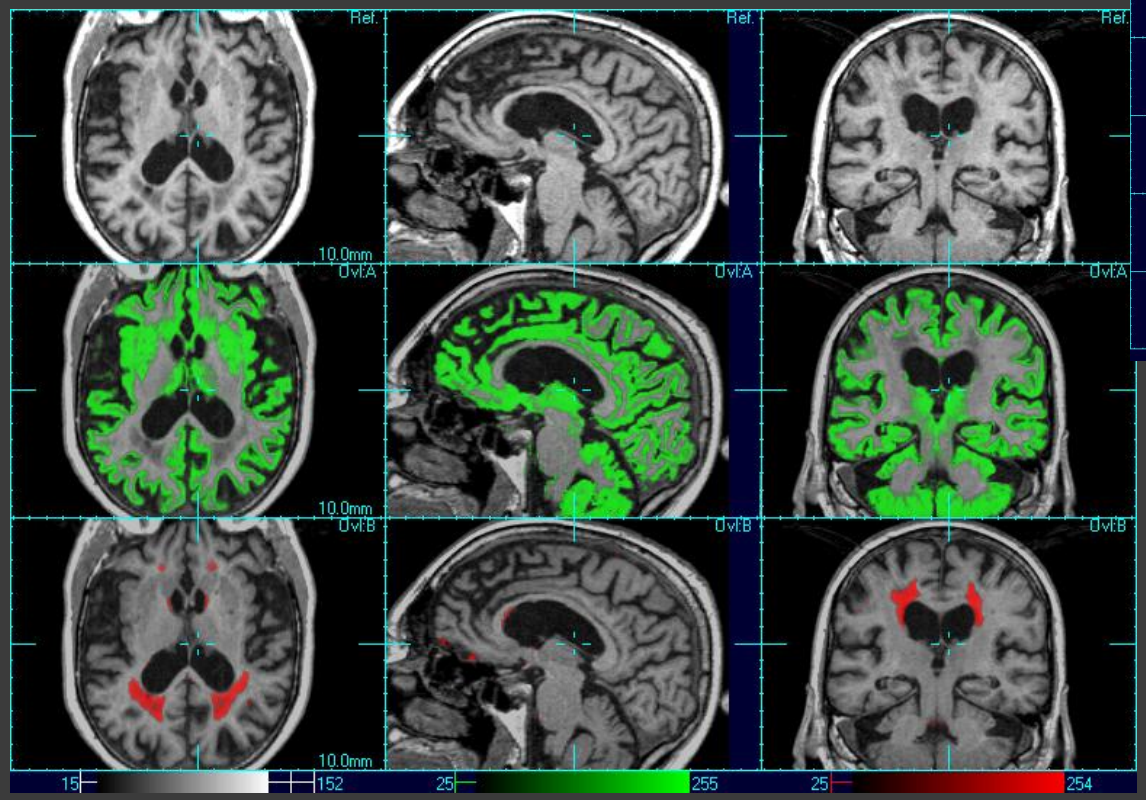

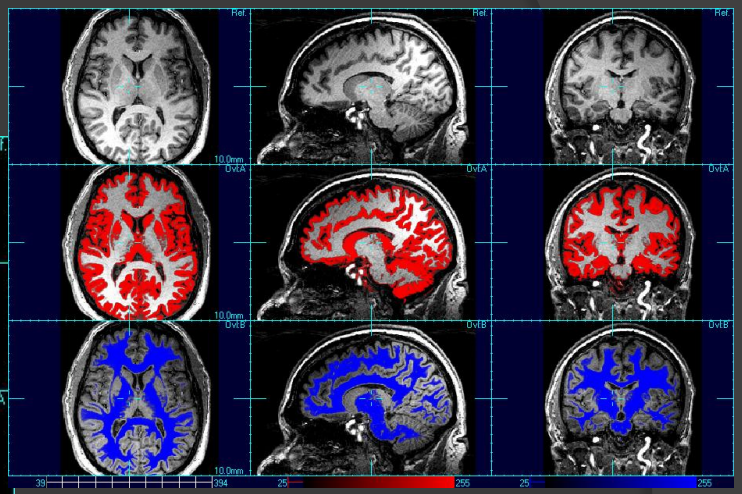

1.5 MRI, SPM2, tissue classes: GM, WM, CSF, WM Lesions

MRF Based Segmentation Using Various Methods

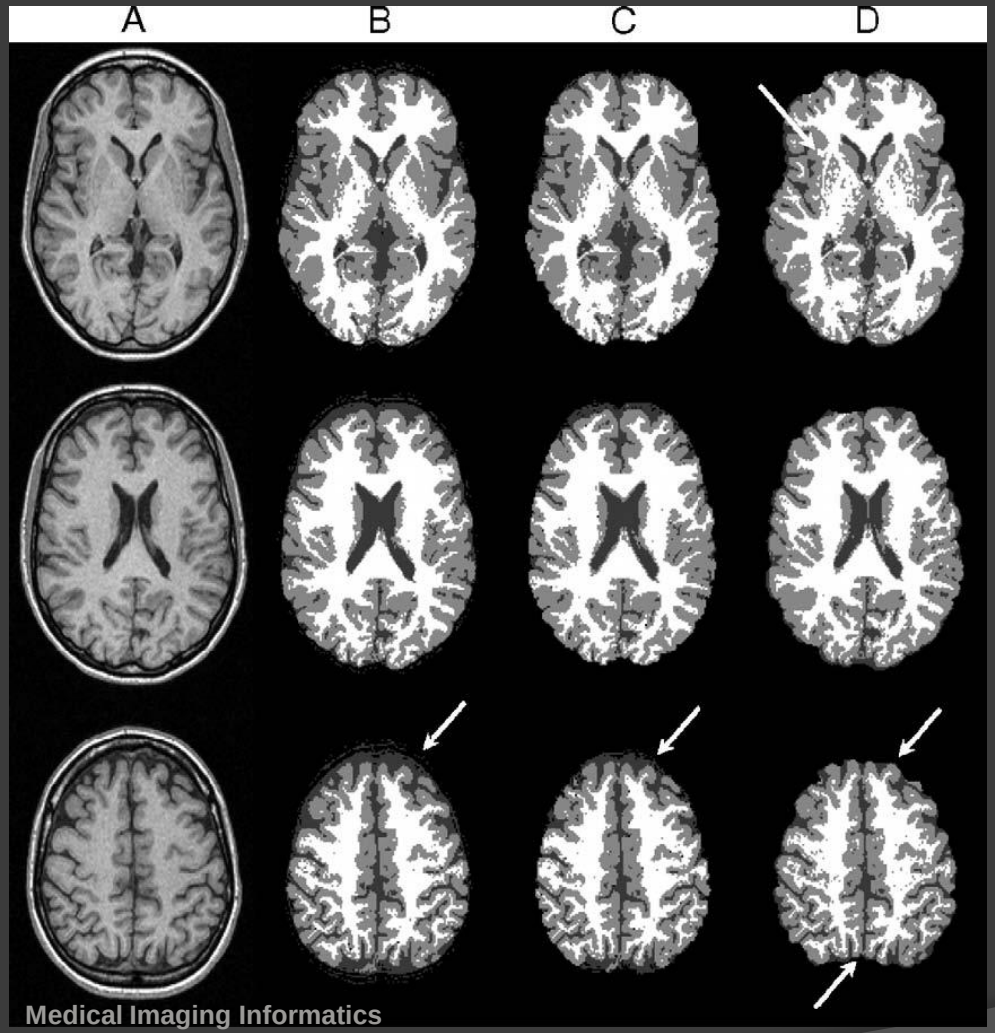

A: Raw MRI
B: SPM2
C: EMS
D: HBSA

from
Habib Zaidi, et al,
NeuroImage 32
(2006) 1591 – 1607

Jie Zhu and Ramin Zabih
Cornell University

GEO-CUTS ALGORITHM FOR 3D BRAIN MRI SEGMENTATION

Department of
Radiology & Biomedical Imaging

Principle Limitations Of MRF

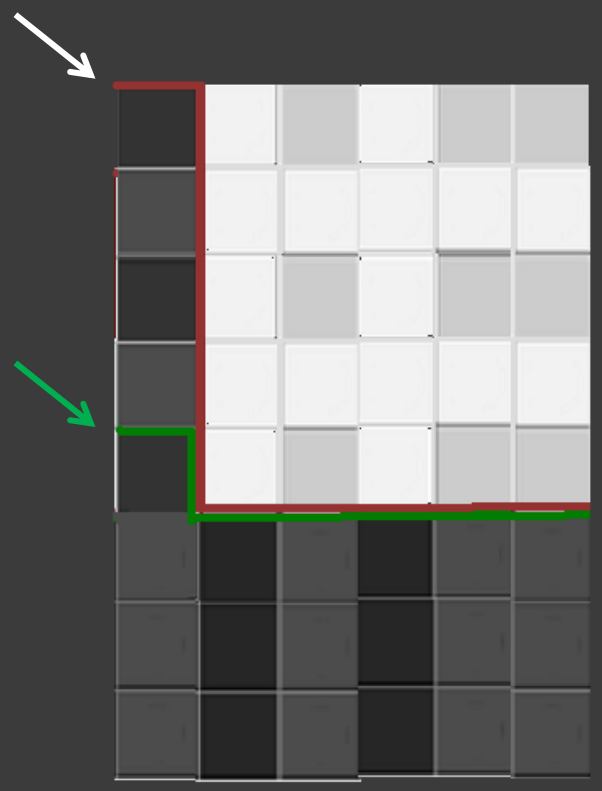

Case where a simple energy minimization might not work:

- green: wrong segmentation
- red: correct segmentation

The segmentation energy of green might be smaller than that of red based on simple separation energy

A Case As Motivation

- EMS

EMS gray matter segmentation

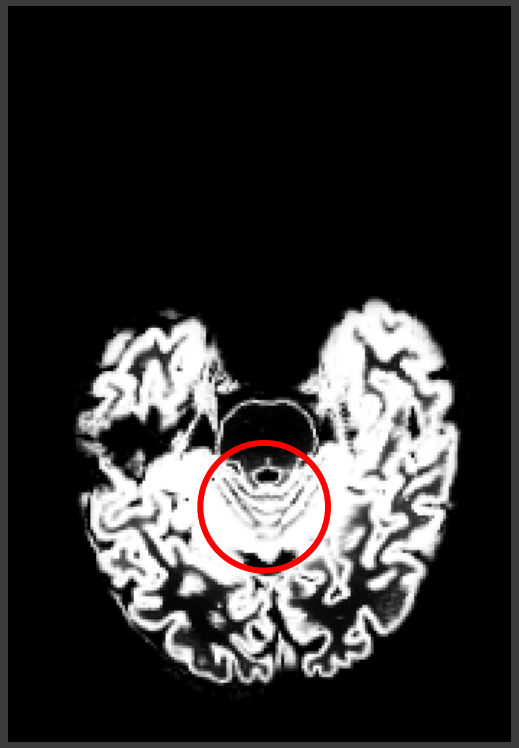

- areas where EMS have problems.

How Geo-cuts Works

- The separation penalty is defined based on magnitude and direction of image gradient:
  - Small gradient magnitude:
    - separation penalty: large (all directions)

$$E\ \ p,q\ \ = \frac{1}{\nabla\ \ I_p - I_q}$$

  - Large gradient magnitude
    - separation penalty :
      - small in direction of gradient.
      - very large in other directions.

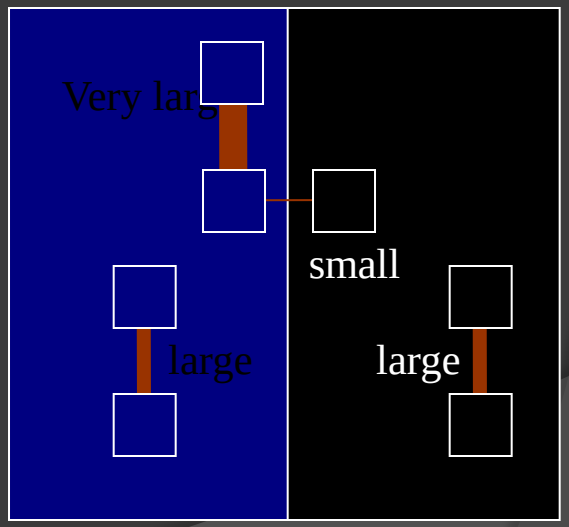

Why Use Geo Cuts

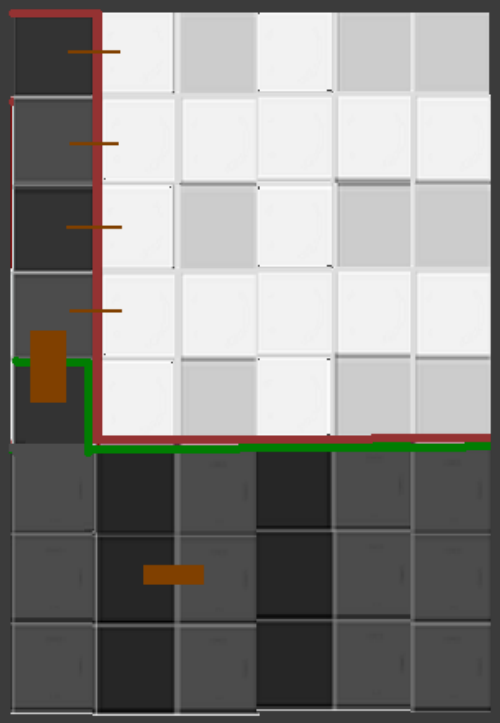

Case where simple separation energy did not work:

- green: wrong segmentation
- red: correct segmentation

Using Geo-cuts leads to

- Higher separation energy for green *than for red.*
- → *Correct segmentation*

EMS vs. Geo Cuts

EMS gray matter

Geo-Cuts gray matter

Geo-Cuts white matter

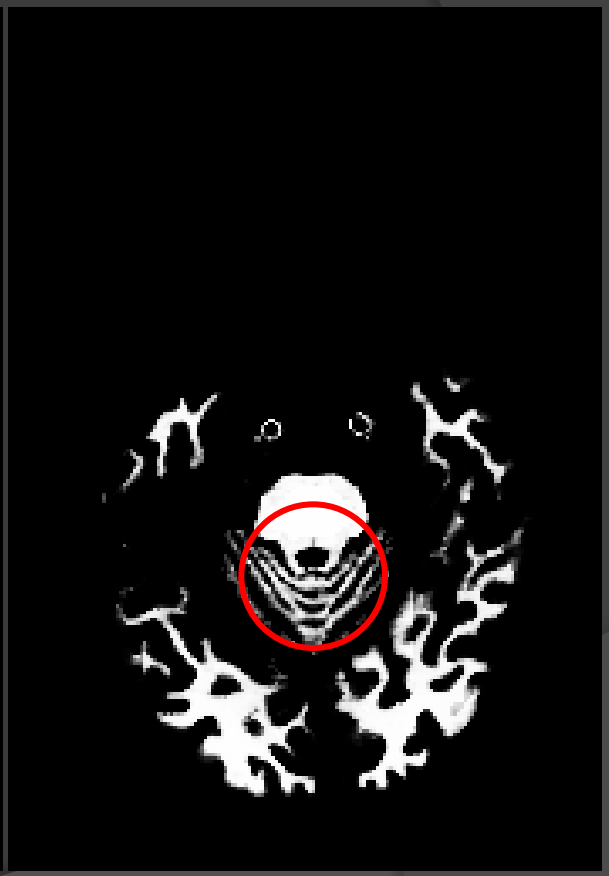

Deformable Models

- So far segmentation methods have not exploited knowledge of shape.
- In shape based methods, the segmentation problem is again formulated as an energy-minimization problem. However, a curve evolves in the image until it reaches the lowest energy state instead of a MRF.
- External and internal forces deform the shape control the evolution of segmentation.

Deformable Template Segmentation

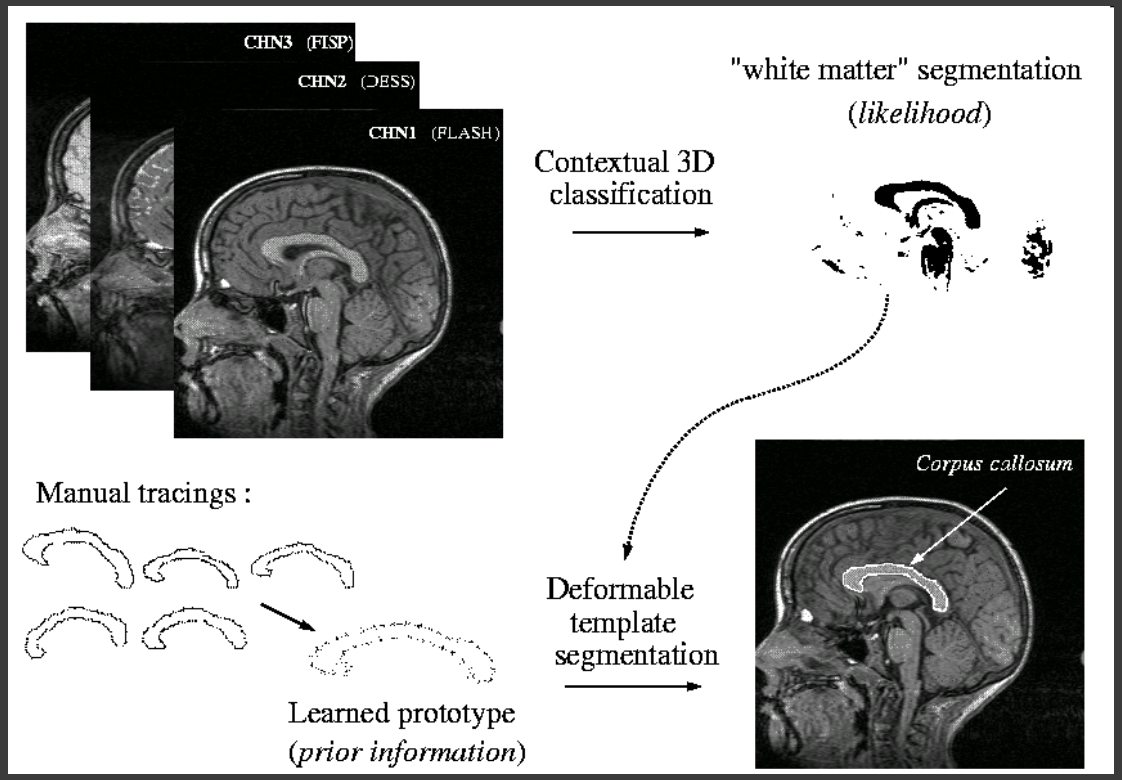

A. Lundervold et al.
Model-guided Segmentation of Corpus Callosum in MR Images
www.uib.no/…/arvid/cvpr99/cvpr99_7pp.html

3D Deformable Surfaces

Automated Delineation of Prostate Bladder and Rectum

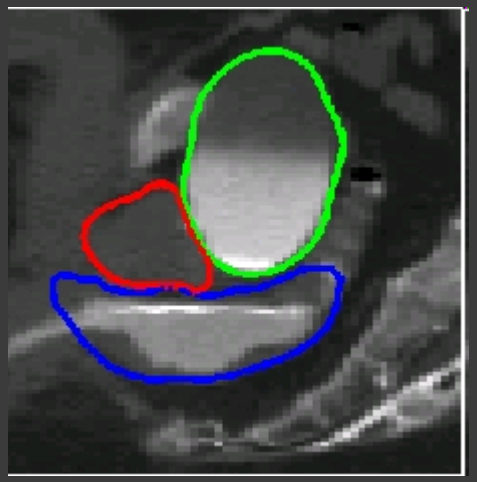

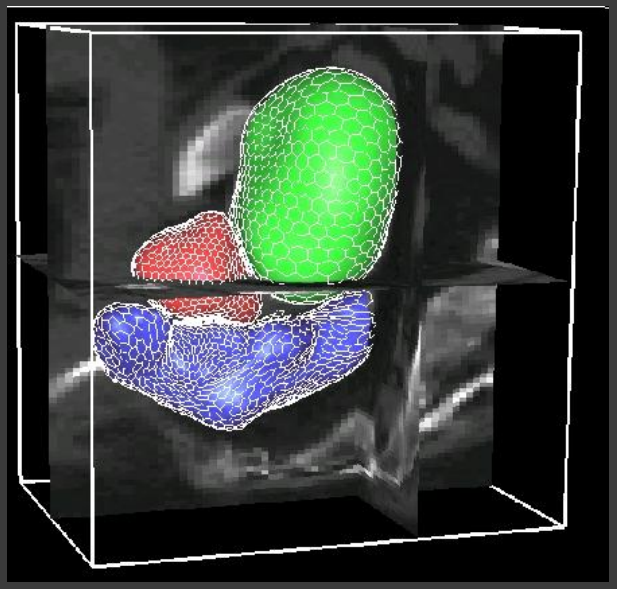

Costa, J. École Nationale Supérieure des Mines de Paris
www.jimenacosta.com/Jime.Publications.MICCAI0

Segmentation Via Texture Extraction

- Two classical methods for feature extraction
  - Co-occurrence matrix (CM)
  - Fractal dimensions (FD)

Co-Occurrance Matrix (CM)

Definition: The CM is a tabulation of how often different combinations of pixel brightness values (gray levels) occur in an image.

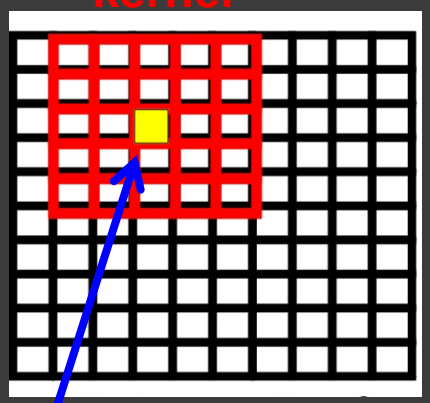

Pixel that stores calculated CM value

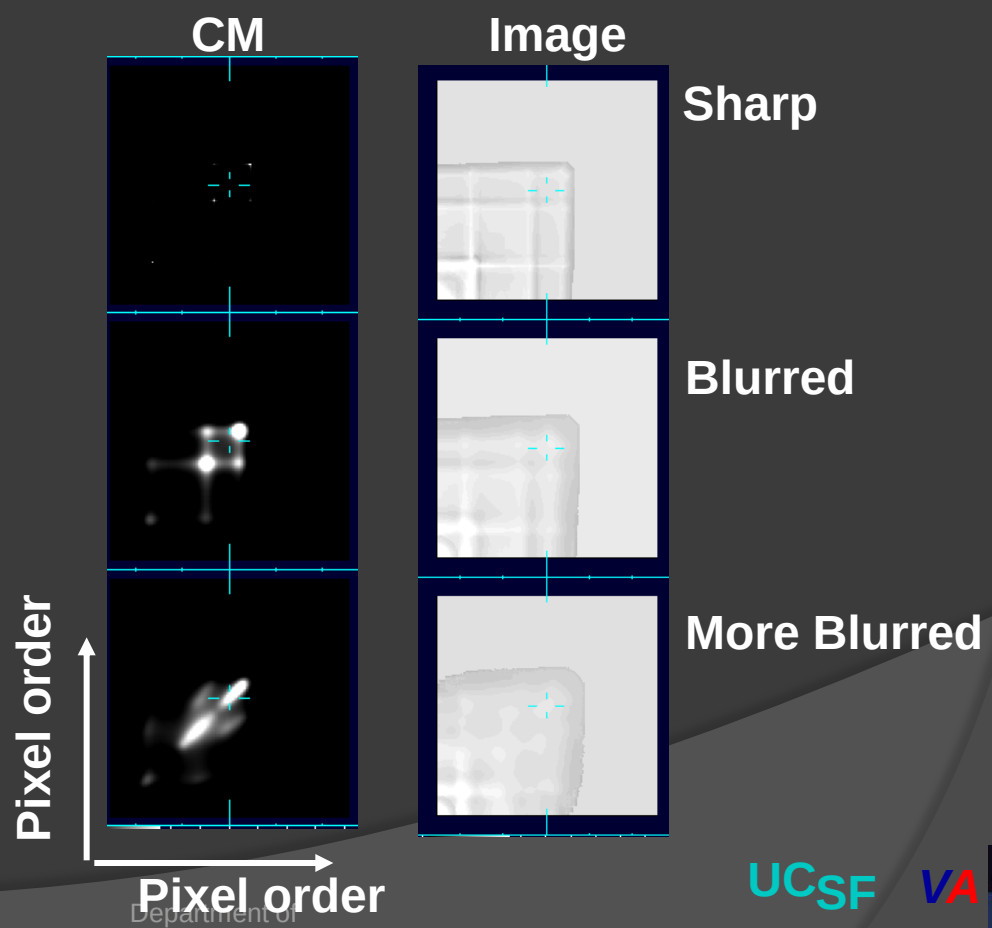

Evaluation of CM

CM

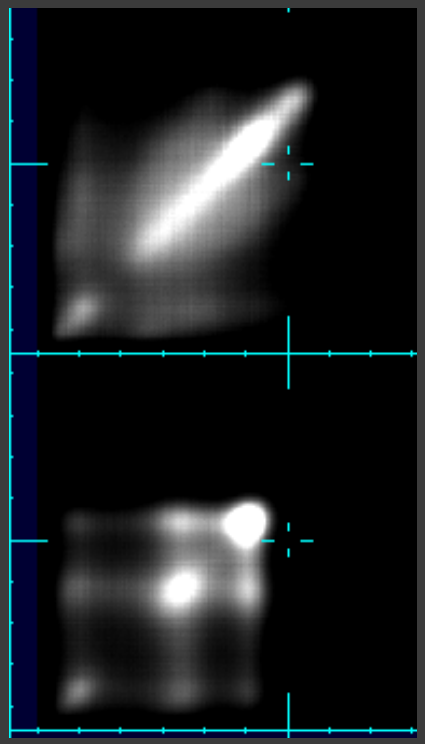

MRI with spatially varying intensity bias

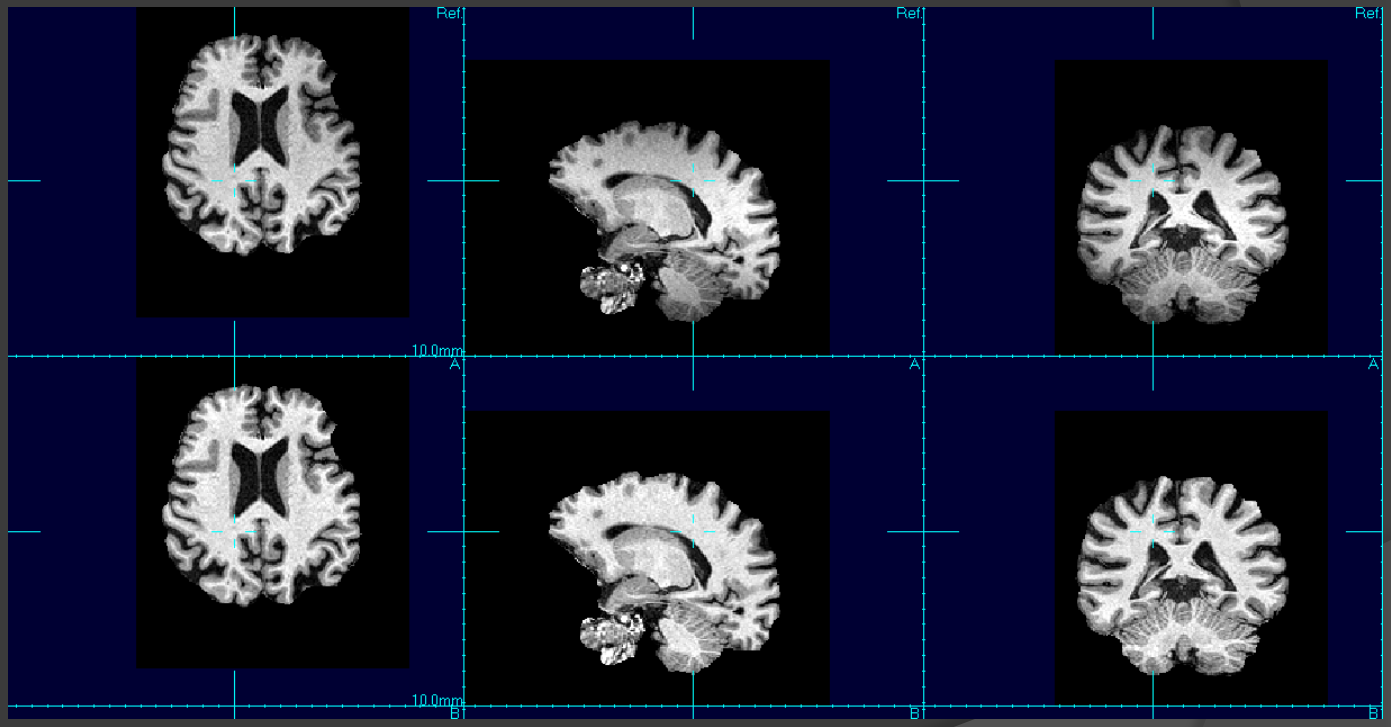

MRI with spatially homogenous intensity bias

Fractal Dimensions

Intuitive Idea:

Many natural objects have structures that are repeated regardless of scale. Repetitive structures can be quantified by fractal dimensions (FD).

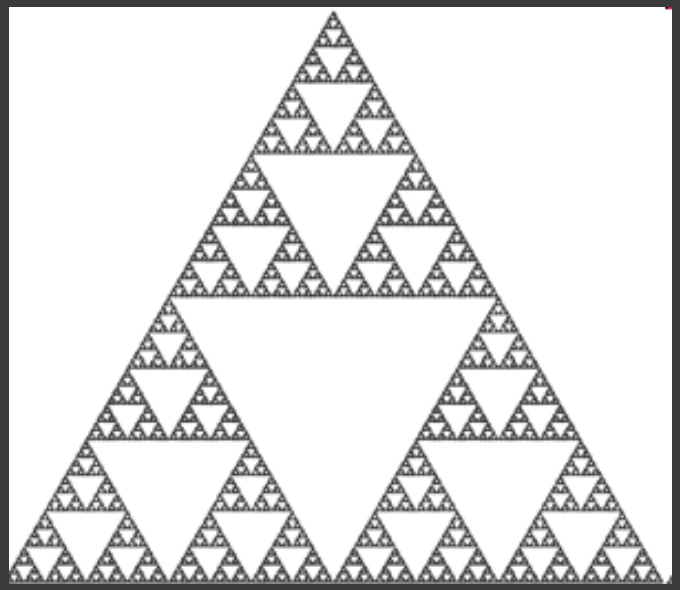

Sierpinski Triangle



Fractal Dimensions

Definition:

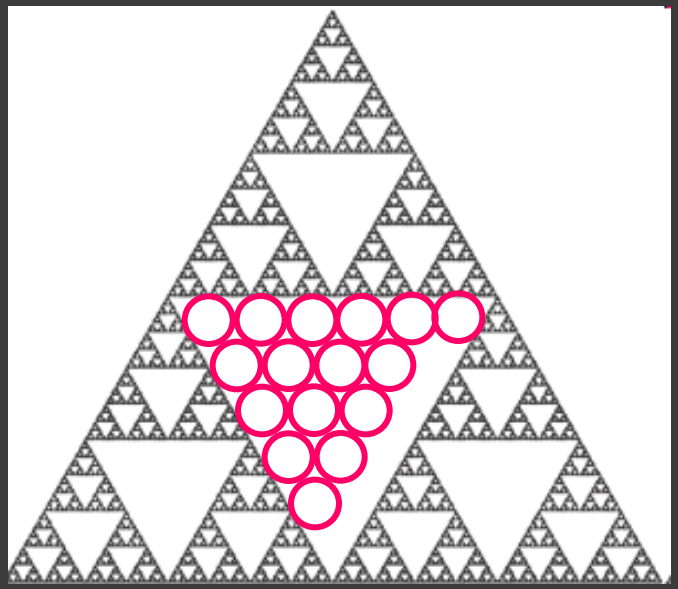

Sierpinski Triangle

Box counting

Fractal Dimensions

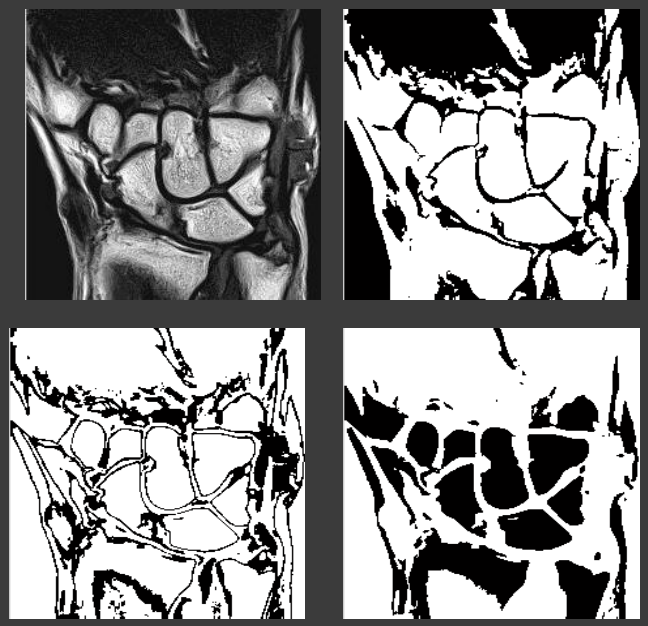

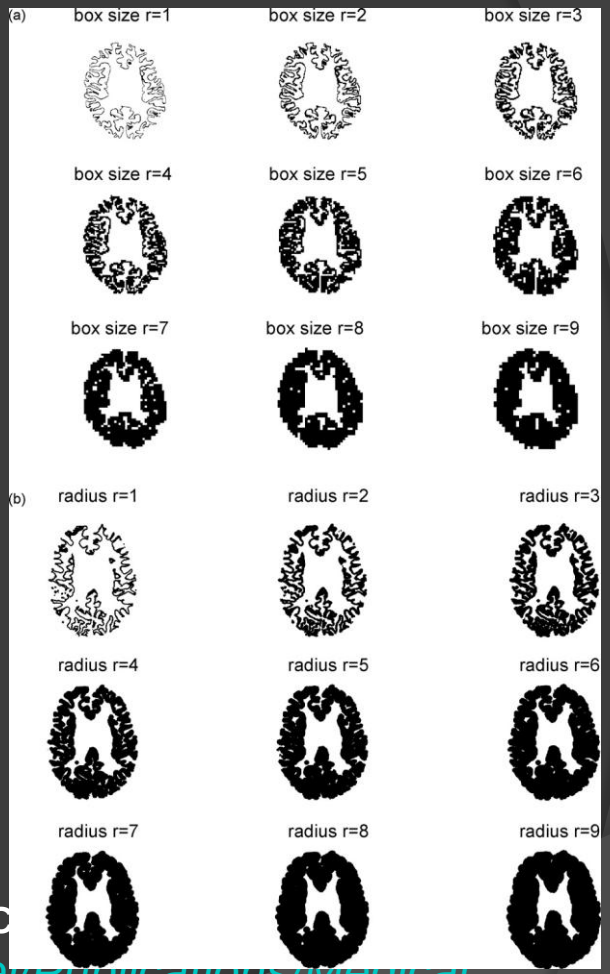

MEDICAL IMAGE SEGMENTATION USING MULTIFRAC

Soundararajan Ezekiel; *www.cosc.iup.edu/sezekiel/Publications/Medical*

Summary

Automated	Semi-automated	Initializing	Manual
Threshold	Region growing	Co-occurrence	Tracing
MRF Shape Models Fractal Dimensions	K-means Fuzzy C-Means		

Literature

1. Segmentation Methods I and II; in Handbook of Biomedical Imaging; Ed. J. S. Suri; Kluwer Academic 2005.
2. WIKI-Books: http://en.wikibooks.org/wiki/SPM-VBM
3. FSL- FAST:http://www.fmrib.ox.ac.uk/fsl/fast4/index.html

David MacKay_ Information T...pdf - Adobe Acrobat Professional

File Edit View Document Comments Forms Tools Advanced Window Help

Create PDF Combine Files Export Forms

Sticky Note Text Edits Show

1 / 2 70.8% Find

[David MacKay]



Comparison of *Information Theory, Inference, and Learning Algorithms* with *Harry Potter*

OK, you're tempted to buy MacKay's book, but you're not sure whether it's the best deal around?

Let's compare it with another textbook with a similar sales rank.

[The Book]
[Corrections]
[Software]
[Dedication]

[Extras]
- [Figures]
- [Exercises]
- [Chapters]
- [Humour] «
- [Links]

[Any Questions?]

Search :

[Home]





	Information Theory, Inference, and Learning Algorithms David J.C. MacKay	*Harry Potter and the Philosopher's Stone* J.K Rowling
Sales rank amazon.co.uk, Mon 5/1/04	5,667	2,486
List Price (UK)	£30.00	£11.99
Number of pages	640	223
Cost per page	4.6p	5.4p
Has large margins for making notes?	Yes	No
Includes		